

On the Diversity-Multiplexing Tradeoff of Unconstrained Multiple-Access Channels

Yair Yona, and Meir Feder, *Fellow, IEEE*

Abstract

In this work the optimal diversity-multiplexing tradeoff (DMT) is investigated for the multiple-input multiple-output fading multiple-access channels with no power constraints (infinite constellations). For K users ($K > 1$), M transmit antennas for each user, and N receive antennas, infinite constellations in general and lattices in particular are shown to attain the optimal DMT of finite constellations for the case $N \geq (K+1)M-1$, i.e. user limited regime. On the other hand, for the case $N < (K+1)M-1$ by deriving an upper bound on the best DMT infinite constellations can achieve for any K , M and N , it is shown that infinite constellations can not attain the optimal DMT of finite constellations. This is in contrast to the point-to-point case where infinite constellations attain the optimal DMT of finite constellations for any M and N . In general, this work shows that the DMT of lattices is optimal in multiple-access channels only when the number of users in the network is limited by the number of transmit and receive antennas, i.e. $K \leq \frac{N-M+1}{M}$. When the network is heavily loaded, i.e. $K > \max(1, \frac{N-M+1}{M})$, taking into account the shaping region in the decoding process plays a crucial role in attaining the optimal DMT. By investigating the cases where infinite constellations are optimal and suboptimal, this work also extends the understanding of the characterization of the optimal DMT of finite constellations.

I. INTRODUCTION

Employing multiple antennas in a point-to-point wireless channel increases the number of degrees of freedom available for transmission. This is illustrated for the ergodic case in [1],[2], where M transmit and N receive antennas increase the capacity by a factor of $\min(M, N)$. The number of degrees of freedom utilized by the transmission scheme is referred to as *multiplexing gain*. Another advantage of employing multiple antennas is the potential increase in the transmitted signal reliability. The fact that multiple antennas increase the number of independent links between antenna pairs, enables the error probability to decrease, i.e. add diversity. In case for large signal to noise ratio (SNR) the error probability is proportional to SNR^{-d} , we state that the *diversity order* is d . For the multiple-access channels, where a number of users transmit to a single receiver, the number of users in the network effects the multiplexing gain and diversity order. For instance, for a network with K users the number of available degrees of freedom is $\min(M, \frac{N}{K})$.

For the point-to-point setting, Zheng and Tse [3] characterized the optimal diversity-multiplexing tradeoff (DMT) of the quasi-static Rayleigh flat-fading channel, i.e. for each multiplexing gain found the best diversity order that can be attained in this channel. The optimal DMT is a piecewise linear function connecting the points $(M-l)(N-l)$, $l = 0, \dots, \min(M, N)$. While the transmission scheme in [3] used random codes, subsequent works presented more structured schemes that attain the optimal DMT, [4] and references therein. In [5] lattice space-time (LAST) codes were presented. These are space-time codes consisting of a subset of an infinite lattice with dimensions per channel use that equal to the number of degrees of freedom available by the channel, i.e. $\min(M, N)$. These codes were shown to achieve the optimal DMT, using lattice decoding followed by modulo operation to the shaping region. It is worth noting that the modulo operation the decoder performs takes into account the finiteness of the codebook. A question that remained open was whether lattices can achieve the optimal DMT using *regular lattice decoding*, i.e. decoder that takes into account the infinite lattice without considering the shaping region. In order to answer this question, the work in [6] extended the methods used by Poltyrev [7], to analyze the performance of infinite constellations (IC's) in multiple-input multiple-output (MIMO) fading channels. A new tradeoff was presented between the IC's average number of dimensions per channel use, i.e. the IC dimensionality divided by the number of channel uses, and the best DMT that can be attained. By choosing the right average number of dimensions per channel use, it was shown [6] that IC's in general and more specifically lattices using regular lattice decoding, attain the optimal DMT of finite constellations.

For the multiple-access channels, Tse et al [8] considered the case where each user attains at least diversity order d . Therefore, they characterized the multiplexing-diversity tradeoff (MDT) of a network with K users where each user has M transmit antennas, and a receiver with N antennas. The MDT characterizes for each diversity order d , the range of multiplexing-gain tuples $(r_1, \dots, r_K)$, corresponding to the K users multiplexing-gains, that attain at least this diversity order for each user. It is worth mentioning that the MDT leads straight forwardly to the optimal DMT, which characterizes the best diversity order the users can obtain for a certain multiplexing-gain tuple. For the symmetric case, where the users transmit the same multiplexing gain r , i.e. $r_1 = \dots = r_K = r$, the authors in [8] also characterized the optimal DMT for the *symmetric* case, that has the following elegant form.

This research was supported by THE ISRAEL SCIENCE FOUNDATION grant No. 634/09.

The authors are with the Department of Electrical Engineering – Systems, Tel-Aviv University, Ramat-Aviv 69978, Israel (e-mails: {yairyo,meir}@eng.tau.ac.il).

- For $r \in \left[0, \min\left(\frac{N}{K+1}, M\right)\right]$ the optimal symmetric DMT equals to the optimal DMT of a point-to-point channel with M transmit and N receive antennas $d_{M,N}^*(r)$.
- For $r \in \left[\min\left(\frac{N}{K+1}, M\right), \min\left(M, \frac{N}{K}\right)\right]$ the optimal symmetric DMT equals to the optimal DMT of the point-to-point channel with all K users pulled together $d_{KM,N}^*(Kr)$.

While in [8] random codes were used in the transmission scheme, Nam and El Gamal [9] showed that the optimal DMT for multiple-access channels is also attained by LAST codes using lattice decoding and modulo operation in the receiver, over the lattice induced by the K users. By extending the methods developed in [6], this work investigates the optimal DMT of IC's in MIMO Rayleigh fading multiple-access channels.

The first part of this work presents an outer bound on the MDT of IC's, i.e. a formulation of an outer bound on the region of multiplexing gain tuples $\underline{r} = (r_1, \dots, r_K)$ that attain diversity order d for each user. This is attained by deriving a lower bound on the error probability of IC's in MIMO multiple-access channels ($K > 1$). For the *symmetric* case, an upper bound on the optimal DMT IC's can achieve is derived. The upper bound is derived by finding for each multiplexing gain r , the average number of dimensions per channel use for each user, that maximizes the diversity order. For the case $N < (K+1)M - 1$ it is shown that the optimal DMT of IC's does not coincide with the optimal DMT of finite constellations. In fact, for $N < (K-1)M + 1$ it is shown that the optimal DMT of IC's in the symmetric case is inferior compared to the optimal DMT of finite constellations, for any value of r except for the edges $r = 0, \frac{N}{K}$. On the other hand for the case $N \geq (K+1)M - 1$, by choosing the correct average number of dimensions per channel use for each user, it is shown that the upper bound on the optimal DMT of IC's coincides with the optimal DMT of finite constellations $d_{M,N}^*(\max(r_1, \dots, r_K))$. In this case we get that the number of users is limited by $1 < K \leq \frac{N-M+1}{M}$, i.e. user limited regime.

In the second part of this work a transmission scheme that attains the optimal DMT in the range $N \geq (K+1)M - 1$ is presented. In this scheme each user ignores the other users and transmits a DMT optimal scheme for the point-to-point channel, presented in [6]. By analyzing the receiver joint maximum-likelihood (ML) decoding performance, it is shown that this transmission scheme attains the optimal DMT of finite constellations. We wish to emphasize that the proposed transmission scheme is more elaborated than simply using orthogonalization between users, which in general is shown to be suboptimal for IC's. In addition it is shown that M sequences of K lattices, together with regular lattice decoding on the lattice induced by the K users, are sufficient to attain the optimal DMT (as oppose to taking different sequence for each multiplexing gain). Finally, the algebraic analysis of the transmission scheme explains why for the case $N \geq (K+1)M - 1$ the optimal DMT of finite constellations equals to the optimal DMT of the point-to-point channel of each user, i.e. why the optimal DMT equals $d_{M,N}^*(\max(r_1, \dots, r_K))$.

As a basic illustrative example of the results consider the following two settings. In the first setting assume a network with two users ($K = 2$), where each user has a single transmit antenna ($M = 1$), and a receiver with a single receive antenna ($N = 1$). In this case the optimal DMT of finite constellations in the symmetric case [8] equals $1 - r$ for $r \in [0, \frac{1}{3}]$, and $2 - 4r$ for $r \in [\frac{1}{3}, \frac{1}{2}]$. For IC's it is shown in this setting that the optimal DMT for the symmetric case equals $1 - 2r$ for $r \in [0, \frac{1}{2}]$, which is strictly inferior except for $r = 0, \frac{1}{2}$. On the other hand by merely adding another receive antenna, i.e. $M = 1, N = K = 2$, the optimal DMT of IC's coincides with finite constellations optimal DMT $d_{1,2}^*(\max(r_1, r_2))$.

It is important to note that for the case $N < (K+1)M - 1$ this work shows the sub-optimality of IC's compared to the optimal DMT of finite constellations. However, in this case an explicit analytical expression for the upper bound on the optimal DMT of IC's is given only for the symmetric case, where for the general case the upper bound is presented in the form of optimization problem. Indeed, for the case $N < (K+1)M - 1$ finding an explicit expression for the general upper bound (the non-symmetric case) on the optimal DMT of IC's, together with a transmission scheme that attains it still remains an open problem. On the other hand, for the case $N \geq (K+1)M - 1$ this work provides both analytical upper bound for the optimal DMT of IC's, and also a transmission scheme that attains it.

The outline of the paper is as follows. In section II basic definitions for the fading multiple-access channels and IC's are given. Section III presents upper bound on the optimal DMT of IC's, and shows the sub-optimality of IC's for the case $N < (K+1)M - 1$. Transmission scheme that attains the optimal DMT of finite constellations for the case $N \geq (K+1)M - 1$, followed by some averaging arguments regarding the ensemble of lattices achieving the optimal DMT, are presented in section IV.

II. BASIC DEFINITIONS

A. Channel Model

We consider K -user multiple access channels where each user has M transmit antennas, and the receiver has N antennas. We assume perfect knowledge of all channels at the receiver, and no channel knowledge at the transmitters. We also assume quasi static flat-fading channel for each user. The channel model is as follows:

$$\underline{y}_t = \sum_{i=1}^K H_i \cdot \underline{x}_t^{(i)} + \rho^{-\frac{1}{2}} \underline{n}_t \quad t = 1, \dots, T \quad (1)$$

where $\underline{x}_t^{(i)}$, $t = 1, \dots, T$ is user i transmitted signal, $\underline{n}_t \sim CN(\underline{0}, \frac{2}{2\pi e} I_N)$ is the additive noise where CN denotes complex-normal, I_N is the N -dimensional unit matrix, and $\underline{y}_t \in \mathbb{C}^N$. H_i is the fading matrix of user i . It consists of N rows and M columns, where $h_{l,j}^{(i)} \sim CN(0, 1)$, $1 \leq l \leq N$, $1 \leq j \leq M$, are the entries of H_i . The scalar $\rho^{-\frac{1}{2}}$ multiplies each element of $\underline{n}_t$, where ρ can be interpreted as the average SNR of each user in the receive antennas for power constrained constellations that satisfy $\frac{1}{T} \sum_{t=1}^T E\{\|\underline{x}_t^{(i)}\|^2\} \leq \frac{2}{2\pi e}$.

Next we wish to define an equivalent channel to (1). Let us define the extended transmission vector

$$\underline{x} = \left\{ \underline{x}_1^{(1)\dagger}, \dots, \underline{x}_1^{(K)\dagger}, \dots, \underline{x}_T^{(1)\dagger}, \dots, \underline{x}_T^{(K)\dagger} \right\}^\dagger \quad (2)$$

i.e., first concatenate the users in each channel use, and then concatenate the vectors between channel uses. Now we define $H = (H_1, \dots, H_K)$ which is an $N \times KM$ matrix. By defining H_{ex} as an $NT \times KMT$ block diagonal matrix, where each block on the diagonal equals H , $\underline{n}_{ex} = \rho^{-\frac{1}{2}} \cdot \{\underline{n}_1^\dagger, \dots, \underline{n}_T^\dagger\}^\dagger \in \mathbb{C}^{NT}$ and $\underline{y}_{ex} \in \mathbb{C}^{NT}$, we can rewrite the channel model in (1)

$$\underline{y}_{ex} = H_{ex} \cdot \underline{x} + \underline{n}_{ex}. \quad (3)$$

Let $L = \min(N, KM)$, and let $\sqrt{\lambda_i}$, $1 \leq i \leq L$ be the real valued, non-negative singular values of H . We assume $\sqrt{\lambda_L} \geq \dots \geq \sqrt{\lambda_1} > 0$. For large values of ρ , we state that $f(\rho) \gtrsim g(\rho)$ when $\lim_{\rho \rightarrow \infty} -\frac{\ln(f(\rho))}{\ln(\rho)} \leq -\frac{\ln(g(\rho))}{\ln(\rho)}$, and also define $\lesssim, \doteq$ in a similar manner by substituting $\leq$ with $\geq, =$ respectively.

B. Infinite Constellations

Infinite constellation (IC) is a countable set $S = \{s_1, s_2, \dots\}$ in $\mathbb{C}^n$. Let $\text{cube}_l(a) \subset \mathbb{C}^n$ be a (probably rotated) l -complex dimensional cube ($l \leq n$) with edge of length a centered around zero. We define an IC S_l to be l -complex dimensional if there exists rotated l -complex dimensional cube $\text{cube}_l(a)$ such that $S_l \subset \lim_{a \rightarrow \infty} \text{cube}_l(a)$ and l is minimal. $M(S_l, a) = |S_l \cap \text{cube}_l(a)|$ is the number of points of the IC S_l inside $\text{cube}_l(a)$. In [7], the n -complex dimensional IC density was defined as

$$\gamma_G = \limsup_{a \rightarrow \infty} \frac{M(S_n, a)}{a^{2n}}$$

and the volume to noise ratio (VNR) for the additive white Gaussian noise (AWGN) channel was given as

$$\mu_G = \frac{\gamma_G^{-\frac{1}{n}}}{2\pi e \sigma^2}$$

where σ^2 is the noise variance of each component.

We now turn to the IC definitions in the transmitters. We define the average number of dimensions per channel use as the IC dimension divided by the number of channel uses. Let us consider user i , where $1 \leq i \leq K$. We denote the average number of dimensions per channel use by D_i . Let us consider a $D_i T$ -complex dimensional sequence of IC's - $S_{D_i T}^{(i)}(\rho)$, where $D_i \leq \frac{L}{K}$, and T is the number of channel uses. First we define $\gamma_{tr}^{(i)} = \rho^{r_i T}$ as the density of $S_{KT}^{(i)}(\rho)$ in transmitter i . Similarly to the definitions in [6] the multiplexing gain of user i IC is defined as

$$r_i = \lim_{\rho \rightarrow \infty} \frac{1}{T} \log_\rho(\gamma_{tr}^{(i)} + 1) = \lim_{\rho \rightarrow \infty} \frac{1}{T} \log_\rho(\rho^{r_i T} + 1), \quad 0 \leq r_i \leq D_i. \quad (4)$$

The VNR in the transmitter of user i is

$$\mu_{tr}^{(i)} = \frac{\gamma_{tr}^{(i)-\frac{1}{D_i T}}}{2\pi e \sigma^2} = \rho^{1 - \frac{r_i}{D_i}} \quad (5)$$

where $\sigma^2 = \frac{\rho^{-1}}{2\pi e}$ is each component additive noise variance. Now let us concatenate the users IC's in accordance with (2). We denote $D = \sum_{i=1}^K D_i$. The concatenation yields an equivalent DT -complex dimensional IC $S_{DT}(\rho)$, that has multiplexing gain $\sum_{i=1}^K r_i$, density $\gamma_{tr} = \rho^{(\sum_{i=1}^K r_i)T}$ and VNR $\mu_{tr} = \rho^{1 - \frac{\sum_{i=1}^K r_i}{D}}$. In this case we get in (3) that the transmitted signal $\underline{x} \in S_{DT}(\rho) \subset \mathbb{C}^{KMT}$.

In the receiver we first define the set $H_{ex} \cdot \text{cube}_{DT}(a)$ as the multiplication of each point in $\text{cube}_{DT}(a)$ with the matrix H_{ex} . In a similar manner, the IC induced by the channel in the receiver is $S'_{DT} = H_{ex} \cdot S_{DT}$. The set $H_{ex} \cdot \text{cube}_{DT}(a)$ is almost surely DT -complex dimensional (where $D \leq L$). In this case

$$M(S_{DT}, a) = |S_{DT} \cap \text{cube}_{DT}(a)| = |S'_{DT} \cap (H_{ex} \cdot \text{cube}_{DT}(a))|.$$

We define the receiver density as

$$\gamma_{rc} = \limsup_{a \rightarrow \infty} \frac{M(S_{DT}, a)}{\text{Vol}(H_{ex} \cdot \text{cube}_{DT}(a))}$$

i.e., the upper limit on the ratio of the number of IC points in $H_{ex} \cdot \text{cube}_{DT}(a)$, and the volume of $H_{ex} \cdot \text{cube}_{DT}(a)$. Note

that for $N \geq KM$ and $D = KM$ we get $\gamma_{\text{rc}} = \rho^{\sum_{i=1}^K r_i T} \cdot \prod_{i=1}^{KM} \lambda_i^{-T}$ and $\mu_{\text{rc}} = \rho^{1 - \frac{\sum_{i=1}^K r_i}{KM}} \cdot \prod_{i=1}^{KM} \lambda_i^{\frac{1}{KM}}$. The joint decoder average decoding error probability, over the points of the effective IC $S_{DT}(\rho)$, for a certain channel realization H , is defined as

$$\overline{Pe}(H, \rho) = \limsup_{a \rightarrow \infty} \frac{\sum_{\underline{x}' \in S'_{DT} \cap (H_{\text{ex}} \cdot \text{cube}_{DT}(a))} Pe(\underline{x}', H, \rho)}{M(S_{DT}, a)} \quad (6)$$

where $Pe(\underline{x}', H, \rho)$ is the error probability associated with $\underline{x}'$. The average decoding error probability of $S_{DT}(\rho)$ over all channel realizations is $\overline{Pe}(\rho) = E_H\{\overline{Pe}(H, \rho)\}$. The *diversity order* is defined as

$$d = - \lim_{\rho \rightarrow \infty} \log_{\rho}(\overline{Pe}(\rho)) \quad (7)$$

III. UPPER BOUND ON THE BEST DIVERSITY-MULTIPLEXING TRADEOFF

In this section we show that in the range $N < (K+1)M - 1$ the DMT of the unconstrained multiple-access channels is suboptimal compared to the optimal DMT of finite constellations. On the other hand in the range $N \geq (K+1)M - 1$, we derive an upper bound on the optimal DMT that coincides with the optimal DMT of finite constellations.

First we lower bound the error probability of any IC in the multiple-access channels, by using lower bounds from point-to-point channels. Then we use this lower bound to formulate outer bound on the MDT of IC's in multiple-access channels. Finally we upper bound the optimal DMT for the symmetric case for any K, M and N , and compare it to finite constellations optimal DMT.

A. Outer Bound on the Multiplexing-Diversity Tradeoff

We begin by lower bounding the error probability of the unconstrained multiple-access channels. Assume user i transmits $D_i T$ -complex dimensional IC, with average number of dimensions per channel use D_i , and T channel uses. We get the following lower bound on the joint decoder error probability.

Lemma 1. *The average decoding error probability of the K -users unconstrained multiple-access channels $\overline{Pe}^{(D_1, \dots, D_K, T)}\left(\rho, \sum_{i=1}^K r_i\right)$, with a tuple of average number of dimensions per channel use $(D_1, \dots, D_K)$, T channel uses and multiplexing gain $\sum_{i=1}^K r_i$, is lower bounded by*

$$\overline{Pe}^{(D_1, \dots, D_K, T)}\left(\rho, \sum_{i=1}^K r_i\right) \geq \max_{A \subseteq \{1, \dots, K\}} \left(Pe(\sum_{a \in A} D_a, T) \left(\rho, \sum_{a \in A} r_a \right) \right)$$

where $Pe(\sum_{a \in A} D_a, T) \left(\rho, \sum_{a \in A} r_a \right)$ is the lower bound on the error probability of any IC with average number of dimensions per channel use $\sum_{a \in A} D_a$, T channel uses and multiplexing gain $\sum_{a \in A} r_a$, in a point-to-point channel with $|A| \cdot M$ transmit antennas and N receive antennas, derived in [6].

Proof: By considering the extended channel model (3), we get that the K distributed transmitters transmit an effective $\left(\sum_{i=1}^K D_i\right) T$ -complex dimensional IC, over T channel uses, with multiplexing gain $\sum_{i=1}^K r_i$. The error probability of this IC is lower bounded by the lower bound on the error probability of any IC with average number of dimensions per channel use $\sum_{i=1}^K D_i$, T channel uses, and multiplexing gain $\sum_{i=1}^K r_i$, in a point-to-point channel with KM transmit and N receive antennas. Such a lower bound on the error probability was derived in [6] for each channel realization ([6] Theorem 1), and then for the average over all channel realizations ([6] Theorem 2). Now consider the set $A \subset \{1, \dots, K\}$. In case a genie tells the receiver the transmitted messages of users $\{1, \dots, K\} \setminus A$, the optimal receiver attains an error probability that lower bounds the K -user optimal receiver error probability. Without loss of optimality, the optimal receiver can subtract them from the received signal, and get a new $|A|$ -users unconstrained multiple-access channels with average number of dimensions per channel use $\{D_a\}_{a \in A}$, T channel uses, and multiplexing gain $\sum_{a \in A} r_a$. In a similar manner, the error probability of this $|A|$ -users channel is lower bounded by the lower bound on the error probability of any IC with $\sum_{a \in A} D_a$ average number of dimensions per channel use, T channel uses, and multiplexing gain $\sum_{a \in A} r_a$, derived in [6]. Hence, the maximal lower bound on the error probability between all $A \subseteq \{1, \dots, K\}$ also sets a lower bound on the error probability. This concludes the proof. ■

Next we wish to formulate an outer bound on the MDT of IC's in the K -user unconstrained multiple-access channels. We wish to derive this bound based on the lower bound on the error probability presented in Lemma 1, and the upper bound on the diversity order resulting from this bound. We begin by presenting a result from [6], on the best DMT IC's can attain in a point-to-point channel.

Theorem 1 (Point-to-point case [6] Theorem 2). *For any sequence of IC's $S_{DT}(\rho)$ with D average number of dimensions per channel use, in a point-to-point channel with M transmit and N receive antennas, the DMT $d_{DT}^{M, N}(\rho)$ is upper bounded*

by

$$d_{DT}^{M,N}(r) \leq d_D^{*,M,N}(r) = \frac{M \cdot N}{D} (D - r)$$

for $0 \leq D \leq \frac{M \cdot N}{N+M-1}$, and

$$d_{DT}^{M,N}(r) \leq d_D^{*,M,N}(r) = \frac{(M-l)(N-l)}{D-l} \cdot (D-r)$$

for $\frac{M \cdot N - (l-1)l}{N+M-1-2(l-1)} \leq D \leq \frac{M \cdot N - l(l+1)}{N+M-1-2l}$, and $l = 1, \dots, \min(M, N) - 1$. In all cases $0 \leq r \leq D$.

Based on Lemma 1 and Theorem 1 we formulate the following outer bound on the MDT.

Theorem 2. *If the tuple $(r_1, \dots, r_K)$ attains diversity order d , then there exists a tuple of average number of dimensions per channel use $(D_1, \dots, D_K)$ such that*

$$d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \geq d \quad \forall A \subseteq \{1, \dots, K\}$$

Proof: From Lemma 1 we can get a lower bound on the error probability of any sequence of effective IC's $S_{\sum_{i=1}^K D_i T}(\rho)$, transmitted by the K users. The lower bound on the error probability of any sequence of IC's, can be translated to an upper bound on the diversity order. Since the error probability lower bound is based on the point-to-point channel lower bounds, we get from Theorem 1 an upper bound on the diversity order of any sequence of IC's in the K users unconstrained multiple-access channels. The maximization over the lower bounds of the error probability in Lemma 1, is replaced by minimization over the upper bounds of the diversity order. This yields an *outer bound* on the MDT, since when the upper bound of the diversity order of a tuple $(r_1, \dots, r_K)$ attains diversity order d , it does not necessarily mean that their actual diversity order equals d . ■

B. Characterizing the Optimal Symmetric DMT

In order to show the sub-optimality of the unconstrained multiple-access channels in the case $N < (K+1)M - 1$, and also that the DMT upper bound coincides with the optimal DMT of finite constellations in the case $N \geq (K+1)M - 1$, we wish to characterize the optimal DMT for the symmetric case, i.e. $r_1 = \dots = r_K = r$.

Based on Lemma 1 and Theorem 2 we can state that the optimal DMT for the symmetric case for K users transmitting a tuple $(D_1, \dots, D_K)$ of average number of dimensions per channel use, with multiplexing gain r for each user, is upper bounded by

$$d_{(D_1, \dots, D_K)}^{K, M, N}(r) \leq \min_{A \subseteq \{1, \dots, K\}} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right). \quad (8)$$

The optimal DMT for the symmetric case is attained by the tuple of average number of dimensions per channel use per user, that maximizes the diversity order for each multiplexing gain, i.e. the optimal DMT in the symmetric case equals $\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{K, M, N}(r)$ for $0 \leq r \leq \frac{L}{K}$. We wish to find the following upper bound on the optimal DMT in the symmetric case

$$\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{K, M, N}(r) \leq \max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right) \quad 0 \leq r \leq \frac{L}{K}, \quad (9)$$

i.e. we wish to solve the optimization problem $\max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right)$ for each $0 \leq r \leq \frac{L}{K}$. In order to solve this optimization problem, we first solve a simpler optimization problem for the case $D_1 = \dots = D_K = D$, i.e. each user transmits D average number of dimensions per channel use. In this case the upper bound in (9) takes a simpler form

$$\max_D \min_{1 \leq i \leq K} \left(d_{i \cdot D}^{*, i \cdot M, N}(i \cdot r) \right). \quad (10)$$

After solving this optimization problem, we will show that choosing $D_1 = \dots = D_K = D$ also yields the optimal solution for $\max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right)$, where $0 \leq r \leq \frac{L}{K}$.

In order to solve the optimization problem in (10), we first need to present some properties on the relations between $d_{i \cdot D}^{*, i \cdot M, N}(i \cdot r)$, $1 \leq i \leq K$. We begin by presenting a property on the behavior of $d_D^{*, M, N}(\cdot)$ as a function of D .

Corollary 1 (point-to-point [6] Corollary 1). *For $0 \leq D \leq \frac{M \cdot N}{N+M-1}$, we get*

$$d_D^{*, M, N}(0) = MN.$$

For $\frac{M \cdot N - (l-1)l}{N+M+1-2(l-1)} \leq D \leq \frac{M \cdot N - l(l+1)}{N+M-1-2l}$, and $l = 1, \dots, \min(M, N) - 1$ we get

$$d_D^{*, M, N}(l) = (M-l) \cdot (N-l).$$

A simple interpretation of Corollary 1 is that for the case $0 \leq D \leq \frac{M \cdot N}{N+M-1}$ the straight lines $d_D^{*,M,N}(\cdot)$ that represent the upper bounds on the DMT, all have the same “anchor” point at multiplexing gain $r = 0$, i.e. they all have diversity order MN for $r = 0$, and each line equals to zero for $r = D$. On the other hand, for $\frac{M \cdot N - (l-1)(l)}{N+M+1-2l} \leq D \leq \frac{M \cdot N - (l)(l+1)}{N+M-1-2l}$, and $l = 1, \dots, \min(M, N) - 1$, the straight lines equal to $(M-l)(N-l)$ for multiplexing gain $r = l$, and again each line equals to zero for $r = D$. Figure 1 illustrates this property for the case $M = N = 2$. Another property relates to the optimal DMT

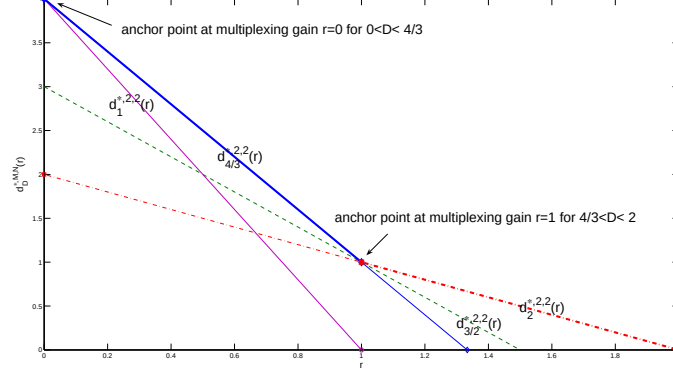


Fig. 1. Upper bound on the DMT of any IC for $M = N = 2$ and D average number of dimensions per channel use, in a point-to-point channel. Note that $d_1^{*,2,2}(r)$ and $d_{4/3}^{*,2,2}(r)$ are straight lines equal to $MN = 4$ for multiplexing gain $r = 0$, where $d_{3/2}^{*,2,2}(r)$ and $d_2^{*,2,2}(r)$ are straight lines equal to $(M-1)(N-1) = 1$ for multiplexing gain $r = 1$, in accordance with Corollary 1. In bold we get the optimal DMT of finite constellations.

of finite constellations in the symmetric case.

Theorem 3 (Optimal DMT of finite constellations [8] Theorem 3). *The optimal DMT of finite constellations in the symmetric case, in the range $0 \leq r \leq \min\left(M, \frac{N}{K+1}\right)$, equals to the optimal DMT of point-to-point channel with M transmit and N receive antennas $d_{M,N}^*(r)$. In the range $\min\left(M, \frac{N}{K+1}\right) \leq r \leq \min\left(M, \frac{N}{K}\right)$ the optimal DMT of finite constellations in the symmetric case equals $d_{KM,N}^*(Kr)$.*

In order to solve the optimization problem in (10) we present several Lemmas relating to the inequalities between $d_{i,D}^{*,i \cdot D,N}(r)$ for $1 \leq i \leq K$. The proofs of these Lemmas rely mainly on Corollary 1 and Theorem 3.

Lemma 2. *For $N \geq (K+1)M - 1$ we get*

$$d_D^{*,M,N}(r) \leq d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) \quad 2 \leq i \leq K$$

for any $0 \leq D \leq M$ and $0 \leq r \leq D$.

Proof: The proof is in appendix A. ■

An example of Lemma 2 for the case $M = K = 2$ and $N = 4$ is illustrated in Figure 2.

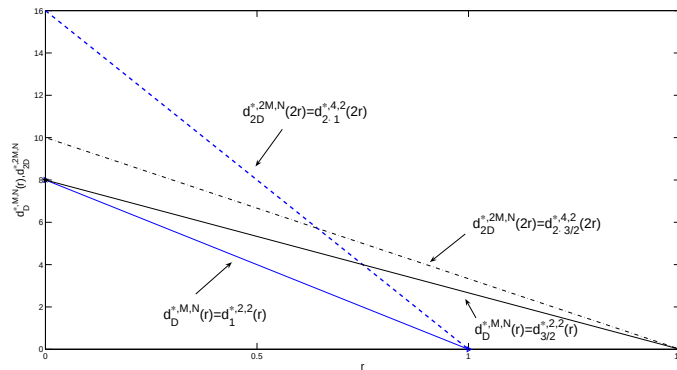


Fig. 2. Illustration of Lemma 2 for the case $M = K = 2$ and $N = 4$. We compare the straight lines $d_D^{*,M,N}(r)$ and $d_{2D}^{*,2M,N}(2r)$ for $D = 1$ and $D = \frac{3}{2}$. It can be seen that for this setting $d_{2D}^{*,2M,N}(2r) > d_D^{*,M,N}(r)$.

Lemma 3. For $N < (K + 1)M - 1$ we get

$$d_D^{*,M,N}(r) \leq d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) \quad 2 \leq i \leq K - 1$$

for any $0 \leq D \leq \frac{L}{K}$ and $0 \leq r \leq D$.

Proof: The proof is in appendix B ■

From Lemmas 2, 3 we can see that the optimization problem in (10) involves only $d_D^{*,M,N}(r)$ and $d_{K \cdot D}^{*,K \cdot M,N}(r)$. Now we prove two more properties that will enable us to find the optimal DMT of IC's in the symmetric case.

Lemma 4. For $N < (K - 1)M + 1$ we get

$$\max_D \min_{1 \leq i \leq K} d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) = d_{\frac{N}{K}}^{*,M,N}(r) = M \cdot N - M \cdot K \cdot r \quad 0 \leq r \leq \frac{N}{K}$$

Proof: The proof is in appendix C ■

From Lemma 4 we can see that for the multiple-access channels, when $N < (M - 1)K + 1$ the optimal DMT of IC's is smaller than finite constellations optimal DMT for any value of r except for $r = 0$ and $r = \frac{N}{K}$. Figure 3 illustrates Lemma 4 for the case $M = N = K = 2$. Next we wish to show the cases where $d_D^{*,M,N}(r)$ and $d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r)$ coincide. For this we first define the straight line

$$d^*(r) = MN - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) - 2 \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\frac{l}{2} - \lfloor \frac{l}{2} \rfloor \right) - (N + M - 1 - l)r.$$

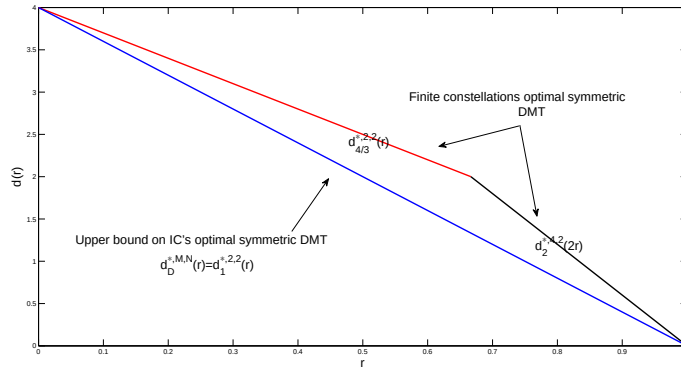


Fig. 3. Illustration of Lemma 4 for the case $M = N = K = 2$. For this case the optimal DMT in the symmetric case is smaller than the optimal DMT of finite constellations, for any value of r except for $r = 0, 1$.

Lemma 5. For $N = (K - 1)M + 1 + l$, where $l = 0, \dots, 2M - 3$, we get for average number of dimensions per channel use per user $D_l = \frac{MN - \lfloor \frac{l}{2} \rfloor \cdot (\lfloor \frac{l}{2} \rfloor + 1) - 2 \cdot (\lfloor \frac{l}{2} \rfloor + 1) \cdot (\frac{l}{2} - \lfloor \frac{l}{2} \rfloor)}{N + M - 1 - l}$ that

$$d_{D_l}^{*,M,N}(r) = d_{K \cdot D_l}^{*,K \cdot M,N}(r) = d^*(r) = (K \cdot r) = MN - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) - 2 \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\frac{l}{2} - \lfloor \frac{l}{2} \rfloor \right) - (N + M - 1 - l)r$$

where $0 \leq r \leq D_l$. In addition

$$d^* \left(\left\lfloor \frac{l}{2} \right\rfloor + 1 \right) = d_{D_l}^{*,M,N} \left(\left\lfloor \frac{l}{2} \right\rfloor + 1 \right) = d_{K \cdot D_l}^{*,K \cdot M,N} \left(K \cdot \left(\left\lfloor \frac{l}{2} \right\rfloor + 1 \right) \right) = d_{M,N}^* \left(\left\lfloor \frac{l}{2} \right\rfloor + 1 \right)$$

and also

$$\begin{aligned} d^* \left(\frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) &= d_{D_l}^{*,M,N} \left(\frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) \\ &= d_{K \cdot D_l}^{*,K \cdot M,N} \left((K - 1)M + \lfloor \frac{l+1}{2} \rfloor \right) = d_{K \cdot M,N}^* \left((K - 1)M + \lfloor \frac{l+1}{2} \rfloor \right) \end{aligned}$$

Proof: The proof is in appendix D. ■

An example that illustrates Lemma 5 for the case $M = K = 2$ and $N = 4$ is given in Figure 4.

Now we are ready to characterize the upper bound on the optimal DMT of IC's in the symmetric case. First let us denote

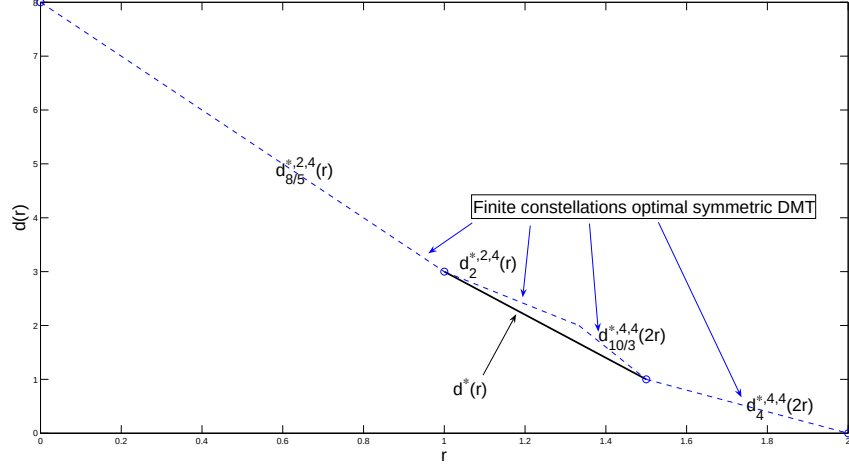


Fig. 4. $d^*(r)$ for the case $M = K = 2$ and $N = 4$, i.e. $l = 1$. Note that $d^*(1) = d_{8/5}^{*,4,2}(1) = d_{2,4}^*(1)$ and $d^*(\frac{3}{2}) = d_4^{*,4,4}(3) = d_{4,4}^*(3)$.

the upper bound on the optimal DMT in the symmetric case (9) by

$$d_{K,M,N}^*(r) = \max_{(D_1, \dots, D_K)} \min_{\forall A \subseteq \{1, \dots, K\}} \left(d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N}(|A| \cdot r) \right) \quad 0 \leq r \leq \frac{L}{K}.$$

Also, for $N = (K - 1)M + 1 + l$ recall that

$$d^*(r) = MN - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) - 2 \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\frac{l}{2} - \lfloor \frac{l}{2} \rfloor \right) - (N + M - 1 - l)r.$$

Theorem 4. The upper bound on the optimal DMT in the symmetric case, $d_{K,M,N}^*(r)$, equals: For $N \geq (K + 1)M - 1$

$$d_{K,M,N}^*(r) = d_{M,N}^*(r).$$

For $N < (K + 1)M - 1$

$$d_{K,M,N}^*(r) = M \cdot N - K \cdot M \cdot r.$$

For $N = (K - 1)M + 1 + l$, where $l = 0, \dots, 2M - 3$

$$d_{K,M,N}^*(r) = \begin{cases} d_{M,N}^*(r) & 0 \leq r \leq \lfloor \frac{l}{2} \rfloor + 1 \\ d^*(r) & \lfloor \frac{l}{2} \rfloor + 1 \leq r \leq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \\ d_{K,M,N}^*(Kr) & \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \leq r \leq \frac{L}{K} \end{cases}$$

Proof: The proof is in appendix E. ■

Figure 4 also presents $d_{K,M,N}^*(r)$ for the case $M = K = 2$ and $N = 4$ (which leads to $l = 1$).

C. Comparison to Finite Constellations

In this subsection we compare the optimal DMT of finite constellations to the upper bound on the optimal DMT of IC's. This comparison enables us to show that for $N \geq (K + 1)M - 1$ the upper bound on the optimal DMT of IC's coincides with the optimal DMT of finite constellations. On the other hand for $N < (K + 1)M - 1$ we show that the upper bound on the optimal DMT of IC's is inferior compared to the optimal DMT of finite constellations. This leads to the conclusion that in the range $N < (K + 1)M - 1$, the best DMT IC's can attain is suboptimal compared to the optimal DMT of finite constellations.

We begin by showing when the upper bound on the optimal DMT of IC's in the symmetric case, $d_{K,M,N}^*(r)$, is suboptimal compared to the optimal DMT of finite constellations. Let us denote the optimal DMT of finite constellations in the symmetric case, presented in Theorem 3 by

$$d_{K,M,N}^{*,(FC)}(r) = \begin{cases} d_{M,N}^*(r) & 0 \leq r \leq \min\left(\frac{N}{K+1}, M\right) \\ d_{K \cdot M, N}^*(K \cdot r) & \min\left(\frac{N}{K+1}, M\right) \leq r \leq \min\left(\frac{N}{K}, M\right) \end{cases}$$

Lemma 6. For either $N \geq (K + 1)M - 1$ or $K = 2$, $M = s + 1$, $N = 3 \cdot s$, where $s \geq 1$ and $s \in \mathbb{Z}$ we get

$$d_{K,M,N}^*(r) = d_{K,M,N}^{*,(FC)}(r).$$

For $N < (K - 1)M + 1$

$$d_{K,M,N}^*(r) < d_{K,M,N}^{*,(FC)}(r) \quad 0 < r < \frac{N}{K}.$$

For $N = (K - 1)M + 1 + l$ where $l = 0, \dots, 2M - 3$

$$d_{K,M,N}^*(r) < d_{K,M,N}^{*,(FC)}(r) \quad \lfloor \frac{l}{2} \rfloor + 1 < r < \frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K}.$$

Proof: For $N \geq (K + 1)M - 1$ it can be easily shown based on Lemma 2 and Corollary 1 that

$$d_{K,M,N}^{*,(FC)}(r) = d_{M,N}^*(r) = d_{K,M,N}^*(r). \quad (11)$$

For $N < (K - 1)M + 1$ we get $\frac{L}{K} = \frac{N}{K}$. In this case from (119), (120) and (121) we get

$$d_D^{*,M,N}(r) < d_{K \cdot D}^{*,K \cdot M,N}(r) \leq d_{K \cdot M,N}^*(K \cdot r) \quad 0 < D \leq \frac{N}{K} \quad (12)$$

for $0 < r < D$. In addition since $\frac{N}{K} < \frac{MN}{N+M-1}$ and $0 < D \leq \frac{N}{K}$ we get from Corollary 1 that

$$d_{K,M,N}^*(r) = MN - KMr < d_{K,M}^*(r) \quad 0 < r \leq \frac{N}{K}. \quad (13)$$

Since $d_{K,M,N}^{*,(FC)}(r)$ consists of $d_{M,N}^*(r)$ and $d_{K \cdot M,N}^*(K \cdot r)$ we get from (12), (13) that

$$d_{K,M,N}^*(r) < d_{K,M,N}^{*,(FC)}(r) \quad 0 < r < \frac{N}{K}.$$

For $N = (K - 1)M + 1 + l$ where $l = 0, \dots, 2M - 3$, recall that we denoted $D_l = \frac{MN - \lfloor \frac{l}{2} \rfloor \cdot (\lfloor \frac{l}{2} \rfloor + 1) - 2 \cdot (\lfloor \frac{l}{2} \rfloor + 1) \cdot (\frac{l}{2} - \lfloor \frac{l}{2} \rfloor)}{N + M - 1 - l}$ and also $r_l = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. In (130) it was shown that $D_l < \frac{MN - (\lfloor \frac{l}{2} \rfloor + 1)(\lfloor \frac{l}{2} \rfloor + 2)}{M + N - 1 - 2(\lfloor \frac{l}{2} \rfloor + 1)}$. Hence, from Corollary 1 we get

$$d^*(r) = d_{D_l}^{*,M,N}(r) < d_{M,N}^*(r) \quad \lfloor \frac{l}{2} \rfloor + 1 < r \leq \frac{L}{K}. \quad (14)$$

On the other hand from (143) we get $D_l > \frac{MN - r_l(K \cdot r_l - 1)}{K \cdot M + N - 1 - 2(K \cdot r_l - 1)}$. Hence based on Corollary 1 we get

$$d^*(r) = d_{K \cdot D_l}^{*,K \cdot M,N}(r) < d_{K \cdot M,N}^*(r) \quad 0 \leq r < \frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (15)$$

Since $d_{K,M,N}^{*,(FC)}(r)$ consists of $d_{M,N}^*(r)$ and $d_{K \cdot M,N}^*(K \cdot r)$, we get from (14), (15)

$$d^*(r) < d_{K,M,N}^{*,(FC)}(r) \quad \lfloor \frac{l}{2} \rfloor + 1 < r < \frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (16)$$

The remaining open point for $N = (K - 1)M + 1 + l$, where $l = 0, \dots, 2M - 3$ is the case

$$\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K - 1)M + \lfloor \frac{l+1}{2} \rfloor}{K}.$$

In Theorem 4 it was shown (see equation (168) in appendix E) that we get equality for $K = 2$, $M = s + 1$ and $N = 3s$, where $s \geq 1$ is an integer. According to Theorem 3, for this case the optimal DMT of finite constellations equals

$$d_{K,M,N}^{*,(FC)}(r) = \begin{cases} d_{s,3s}^*(r) & 0 \leq r \leq \frac{N}{K+1} = s \\ d_{2s,3s}^*(2 \cdot r) & s \leq r \leq 3s. \end{cases}$$

Hence, from (170) we get $d_{2,s+1,3s}^{*,(FC)}(r) = d_{2,s+1,3s}^*(r)$. By simply assigning we get that in this case $N < (K + 1)M - 1$. This concludes the proof. $\blacksquare$

The sub-optimality of $d_{K,M,N}^*(r)$ for the case $N < (K - 1)M + 1$ is illustrated in Figure 3, where the sub-optimality for the case $N = (K - 1)M + 1 + l$, where $l = 0, \dots, 2m - 3$ is illustrated in Figure 4.

Now we are ready to present the cases where the upper bound on the optimal DMT of the unconstrained multiple-access channels coincides with the optimal DMT of finite constellations, and the cases where the optimal DMT of the unconstrained multiple-access channels is suboptimal compared to the optimal DMT of finite constellations.

Theorem 5. For $N \geq (K + 1)M - 1$ there exists an upper bound on the DMT of the unconstrained multiple-access channels, that equals to the optimal DMT of finite constellations, $d_{M,N}^*(\max(r_1, \dots, r_K))$. For $N < (K + 1)M - 1$ the best DMT that can be attained by the unconstrained multiple-access channels is inferior compared to the optimal DMT of finite constellations.

Proof: We begin by finding for $N \geq (K + 1)M - 1$ an upper bound on the DMT of the unconstrained multiple-access

channels, that equals to the optimal DMT of finite constellations $d_{M,N}^*(\max(r_1, \dots, r_K))$. The proof relies on the upper bound on the optimal DMT in the symmetric case $d_{K,M,N}^*(r)$. For $N \geq (K+1)M-1$ it was shown in Lemma 6 that

$$d_{K,M,N}^*(r) = d_{M,N}^*(r). \quad (17)$$

Let us denote the DMT of a rate tuple $(r_1, \dots, r_K)$ with a tuple of average number of dimensions per channel use per user $(D_1, \dots, D_K)$ by $d_{(D_1, \dots, D_K)}^{*,K,M,N}(r_1, \dots, r_K)$. The optimal DMT equals $\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{*,K,M,N}(r_1, \dots, r_K)$. Hence, Theorem 2 can be rewritten as

$$\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{*,K,M,N}(r_1, \dots, r_K) \leq \max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right). \quad (18)$$

We wish to solve the optimization $\max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right)$. We solve it by showing that the upper and lower bounds on this term coincide. For the rate tuple $(r_1, \dots, r_K)$ let us define $r_{max} = \max(r_1, \dots, r_K)$. We begin by lower bounding the optimization problem. Based on Lemma 2 and the fact that $d_{i \cdot D}^{*,iM,N}(i \cdot r)$, $i = 1, \dots, K$ are straight lines as a function of r we get

$$d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \geq d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} (|A| \cdot r_{max}) \geq d_{\frac{\sum_{a \in A} D_a}{|A|}}^{*,M, N} (r_{max}) \quad \forall A \subseteq \{1, \dots, K\}. \quad (19)$$

Hence, we get

$$\min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \geq \min_{A \subseteq \{1, \dots, K\}} d_{\frac{\sum_{a \in A} D_a}{|A|}}^{*,M, N} (r_{max}). \quad (20)$$

From Corollary 1 we know that

$$\max_D d_D^{*,M, N} (r_{max}) = d_{M,N}^*(r_{max}) \quad (21)$$

obtained for $D_{max} = \frac{MN - |r_{max}| \cdot (|r_{max}| + 1)}{N + M - 1 - 2 \cdot \lfloor r_{max} \rfloor}$. Hence, from (20), (21) we get

$$\max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \geq \max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\frac{\sum_{a \in A} D_a}{|A|}}^{*,M, N} (r_{max}) = d_{M,N}^*(r_{max}) \quad (22)$$

obtained for $D_1 = \dots = D_K = D_{max}$. Next we upper bound the optimization problem and show it coincides with the lower bound. Without loss of generality assume $r_i = r_{max}$. In this case we get

$$\min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \leq d_{D_i}^{*,M, N} (r_{max}). \quad (23)$$

From (21), (23) we can write

$$\max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) \leq \max_{D_i} d_{D_i}^{*,M, N} (r_{max}) = d_{M,N}^*(r_{max}) \quad (24)$$

obtained for $D_i = D_{max}$. Hence, from (20) (22), (24) we get

$$\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{*,K,M,N}(r_1, \dots, r_K) = \max_{(D_1, \dots, D_K)} \min_{A \subseteq \{1, \dots, K\}} d_{\sum_{a \in A} D_a}^{*,|A| \cdot M, N} \left(\sum_{a \in A} r_a \right) = d_{M,N}^*(r_{max}) \quad (25)$$

which is the optimal DMT of finite constellations.

Now we show for $N < (K+1)M-1$ that the optimal DMT of the unconstrained multiple-access channels is suboptimal compared to the optimal DMT of finite constellations. We do that by showing that there exists a set B , of multiplexing gain tuples $(r_1, \dots, r_K)$ for which

$$\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{*,K,M,N}(r_1, \dots, r_K) < d_{K,M,N}^{*(FC)}(r_1, \dots, r_K) \quad \forall (r_1, \dots, r_K) \in B$$

where $d_{K,M,N}^{*(FC)}(r_1, \dots, r_K)$ is the optimal DMT of finite constellations. We divide the sub-optimality proof for $N < (K+1)M-1$ to several cases. We begin with the case $N < (K-1)M+1$. For this case we show the sub-optimality by considering symmetric multiplexing gain tuples, i.e. $r_1 = \dots = r_K = r$. In this case from Lemma 6 we know that

$$\max_{(D_1, \dots, D_K)} d_{(D_1, \dots, D_K)}^{*,K,M,N}(r, \dots, r) \leq d_{K,M,N}^*(r) < d_{K,M,N}^{*(FC)}(r) = d_{K,M,N}^{*(FC)}(r, \dots, r) \quad 0 < r < \frac{N}{K}.$$

Hence, in this case we have proved the sub-optimality based on the optimal DMT in the symmetric case. Now we prove the sub-optimality for the case $N = (K-1)M + 1 + l$, where $l = 0, \dots, 2M-3$. In Lemma 6 we have showed for $r_1 = \dots = r_K = r$ that

$$d_{K,M,N}^*(r) < d_{K,M,N}^{*,(FC)}(r) \quad \lfloor \frac{l}{2} \rfloor + 1 < r < \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (26)$$

Hence, for the case where $\lfloor \frac{l}{2} \rfloor + 1 \neq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ this shows the sub-optimality of any IC's DMT. Therefore, in order to complete the sub-optimality proof we are only left with the case $\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$.

In Theorem 4 we have shown that $\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ only when $K = 2$, $M = s+1$ and $N = 3s$, where $s \geq 1$ is an integer. Note that in this case, due to the equality, we can not obtain the sub-optimality from the symmetric case and we need to find a set of multiplexing gain tuples B for which

$$\max_{(D_1, D_2)} d_{(D_1, D_2)}^{*,2,s+1,3s}(r_1, r_2) < d_{2,s+1,3s}^{*,(FC)}(r_1, r_2) \quad (r_1, r_2) \in B. \quad (27)$$

In order to find the set B we first present several properties of $d_{2,s+1,3s}^*(r)$, i.e. the optimal DMT of IC's in the symmetric case, for this case. First note that from Theorem 4 we get

$$d_{2,s+1,3s}^*(r) = \begin{cases} d_{s+1,3s}^*(r) & 0 \leq r \leq \frac{N}{K+1} = s \\ d_{2(s+1),3s}^*(2 \cdot r) & s \leq r \leq \min(s+1, \frac{3}{2}s) \end{cases}.$$

An example of $d_{2,s+1,3s}^*(r)$ for the case $M = 3$, $N = 6$ and $K = 2$, i.e. $s = 2$, is given in Figure 5. From simple assignment

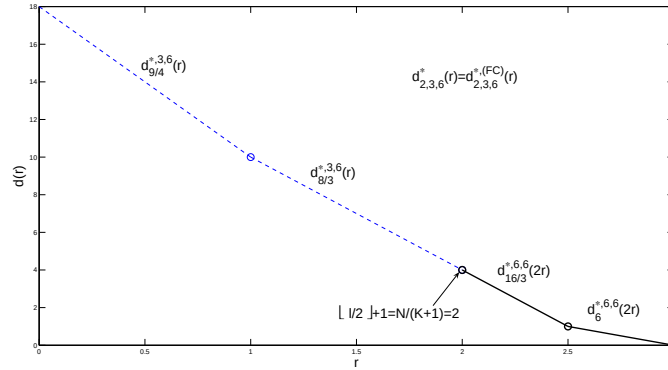


Fig. 5. The upper bound on the optimal DMT of IC's in the symmetric case, for the case $K = 2$, $M = 3$, $N = 6$. Note that for this case we get $\lfloor \frac{l}{2} \rfloor + 1 = \frac{N}{K+1} = \frac{(K-1)M + 1 + \lfloor \frac{l+1}{2} \rfloor}{K}$. In addition this upper bound coincides with the optimal DMT of finite constellations in the symmetric case. Finally, for this case we get $d_{\frac{8}{3}}^{*,3,6}(r) = d_{\frac{16}{3}}^{*,6,6}(2r)$.

of the values of M , N and K we get that $l = 2(s-1)$. We know from Lemma 5, Theorem 3 and (168) that

$$d_{D_l}^{*,s+1,3s}\left(\frac{N}{K+1}\right) = d_{s+1,3s}^*\left(\frac{N}{K+1}\right) = d_{2 \cdot (s+1),3s}^*\left(\frac{K \cdot N}{K+1}\right) = d_{2 \cdot D_l}^{*,2(s+1),3s}\left(\frac{K \cdot N}{K+1}\right). \quad (28)$$

Hence, from (169) and (28) we get

$$d_{D_{\lfloor \frac{l}{2} \rfloor}}^{*,s+1,3s}(r) = d_{2 \cdot D_{r_l}}^{*,2(s+1),3s}(2 \cdot r). \quad (29)$$

Finally, from Corollary 1 we get

$$d_{D_{\lfloor \frac{l}{2} \rfloor}}^{*,s+1,3s}(r) = d_{2 \cdot D_{r_l}}^{*,2(s+1),3s}(2 \cdot r) = d_{s+1,3s}^*(r) \quad s-1 \leq r \leq \frac{N}{K+1} = s \quad (30)$$

and

$$d_{D_{\lfloor \frac{l}{2} \rfloor}}^{*,s+1,3s}(r) = d_{2 \cdot D_{r_l}}^{*,2(s+1),3s}(2 \cdot r) = d_{2 \cdot (s+1),3s}^*(2 \cdot r) \quad s \leq r \leq s + \frac{1}{2} \quad (31)$$

i.e., The last line of $d_{s+1,3s}^*(r)$ before $\frac{N}{K+1} = s$, and the first line of $d_{2(s+1),3s}^*(2r)$ after s are equal. To sum up, for $\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ the optimal DMT of IC's in the symmetric case is a piecewise linear function as expected, and we have found the straight line coincide with it for $s-1 \leq r \leq s + \frac{1}{2}$. We are interested in finding a set of multiplexing gain tuples B , for which (27) is fulfilled. In a nutshell we are interested in finding a set such that the optimal DMT of finite

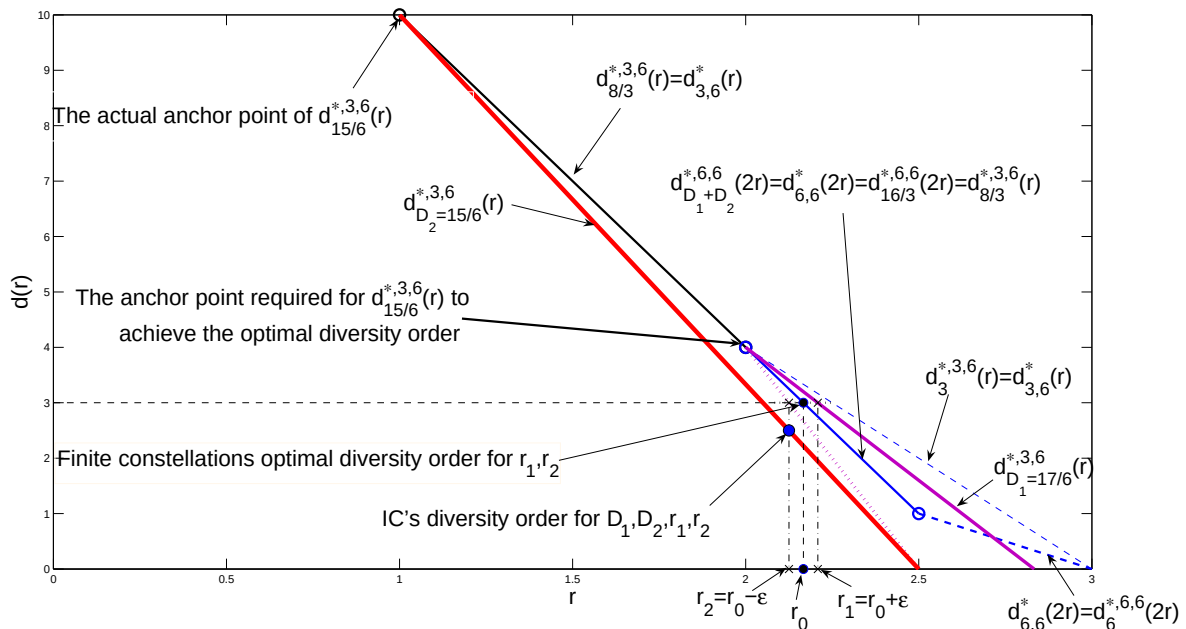


Fig. 6. Illustration of the sub-optimality of the unconstrained multiple-access channels for $M = 3$, $N = 6$ and $K = 2$. In this example we take $r_1 = r_0 + \epsilon = \frac{13}{6} + \frac{1}{24}$ and $r_2 = r_0 - \epsilon = \frac{13}{6} - \frac{1}{24}$, where $r_0 = \frac{13}{6}$. In this case the optimal diversity order of finite constellations equals $\min(d_{3,6}^{*,3}(r_1), d_{3,6}^{*,3}(r_2), d_{6,6}^{*,3}(r_1 + r_2))$. From the figure it can be seen that the minimum is obtained for $d_{6,6}^{*,3}(r_1 + r_2) = d_{6,6}^{*,3}(2r_0) = 3$. On the other hand IC's diversity order equals $\min(d_{D_1}^{*,3,6}(r_1), d_{D_2}^{*,3,6}(r_2), d_{D_1+D_2}^{*,6,6}(2r_0))$. In this example we choose $D_1 = \frac{8}{3} + \frac{1}{6}$, $D_2 = \frac{8}{3} - \frac{1}{6}$. In this case we get $d_{D_1+D_2}^{*,6,6}(2r_0) = d_{\frac{16}{3}}^{*,6,6}(2r_0) = 3$, $d_{D_1}^{*,3,6}(r_1) = d_{\frac{17}{6}}^{*,3,6}(r_1) = 3$ and $d_{D_2}^{*,3,6}(r_2) = d_{\frac{15}{6}}^{*,3,6}(r_2) = \frac{5}{2} < 3$. Hence, in this case the diversity order of IC's is smaller than the optimal diversity order of finite constellations. It results from the fact that for $D_2 < \frac{8}{3}$ the straight lines $d_{D_2}^{*,3,6}(r)$ rotate around anchor points with multiplexing gain smaller than 2, where they should rotate around anchor point with multiplexing gain 2.

$$d_{s+1,3s}^*(r) = d_{D_{s+1}^{s+1,3s}}^*(r) \quad s \leq r \leq s+1. \quad (32)$$

Hence, for certain $s < r_0 < s + \frac{1}{2}$, we are interested in the set for which $r_1 = r_0 + \epsilon$, $r_2 = r_0 - \epsilon$ such that $s < r_0 + \epsilon < s + \frac{1}{2}$ and also

$$d_{D^*}^{*,s+1,3s}(r_0) = d_{2(s+1),3s}^*(2r_0) < d_{s+1,3s}^*(r_0 + \epsilon) = d_{D^*}^{*,s+1,3s}(r_0 + \epsilon) \quad (33)$$

where the first equality results from (31). Note that (33) can be fulfilled because from Corollary 1 we get $d_{D^*}^{*,s+1,3s}(\lfloor \frac{r}{2} \rfloor) < d_{D^*}^{*,s+1,3s}(\lfloor \frac{r}{2} \rfloor + 1)$ for $r > s$. In order to translate this condition to ϵ we write the following inequality

$$d_{D_{\lfloor \frac{l}{2} \rfloor + 1}^*, s+1, 3s}(r_0 + \epsilon) = MN - \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\lfloor \frac{l}{2} \rfloor + 2 \right) - \left(N + M - 1 - 2 \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \right) (r_0 + \epsilon) >$$

$$MN - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) - \left(N + M - 1 - 2 \cdot \lfloor \frac{l}{2} \rfloor \right) r_0 = d_{D_{\lfloor \frac{l}{2} \rfloor}^*, s+1, 3s}(r_0) \quad (34)$$

When assigning $K = 2$, $M = s + 1$ and $N = 3s$ we get

$$\epsilon < \frac{r_0}{s} - 1. \quad (35)$$

Hence, the set of multiplexing gain tuples we are considering is

$$B_{r_0} = \left\{ r_1, r_2 | r_1 = r_0 + \epsilon, r_2 = r_0 - \epsilon, 0 < \epsilon < \min \left(r_0 + \frac{r_0}{s} - 1, s + \frac{1}{2} \right) - r_0 \right\} \quad (36)$$

where $s < r_0 < s + \frac{1}{2}$ is a parameter determining the set. From [8, Lemma 7] we get that the optimal DMT of finite constellations equals

$$d_{2,s+1,3s}^{*,(FC)}(r_1, r_2) = \min \left(d_{s+1,3s}^*(r_1), d_{s+1,3s}^*(r_2), d_{2(s+1),3s}^*(r_1 + r_2) \right). \quad (37)$$

Considering $(r_1, r_2) \in B_{r_0}$, based on (33), (36) and the fact that $d_{s+1,3s}^*(r)$ is a straight line, we get

$$\begin{aligned} d_{2,s+1,3s}^{*,(FC)}(r_1, r_2) &= \min \left(d_{s+1,3s}^*(r_0 + \epsilon), d_{s+1,3s}^*(r_0 - \epsilon), d_{2(s+1),3s}^*(2r_0) \right) \\ &= d_{2(s+1),3s}^*(2r_0) \quad 0 < \epsilon < \min \left(r_0 + \frac{r_0}{s} - 1, s + \frac{1}{2} \right) - r_0. \end{aligned} \quad (38)$$

Hence, in order to prove (27) we need to show for certain $0 < r_0 < s + \frac{1}{2}$ that

$$\max_{(D_1, D_2)} d_{(D_1, D_2)}^{*,2,s+1,3s}(r_0 + \epsilon, r_0 - \epsilon) < d_{2(s+1),3s}^*(2r_0) \quad 0 < \epsilon < \min \left(r_0 + \frac{r_0}{s} - 1, s + \frac{1}{2} \right) - r_0. \quad (39)$$

From (18) we get the following upper bound on the optimal DMT of IC's

$$\max_{(D_1, D_2)} d_{(D_1, D_2)}^{*,2,s+1,3s}(r_0 + \epsilon, r_0 - \epsilon) \leq \max_{(D_1, D_2)} \min \left(d_{D_1}^{*,s+1,3s}(r_0 + \epsilon), d_{D_1+D_2}^{*,2(s+1),3s}(2r_0), d_{D_2}^{*,s+1,3s}(r_0 - \epsilon) \right). \quad (40)$$

We wish to show that this upper bound on the optimal DMT of IC's is smaller than $d_{2(s+1),3s}^*(2r_0)$. We begin the proof by taking the symmetric case, i.e. $D_1 = D_2$, as a baseline. We assign $D_1 = D_2 = D_{r_l}^* = D_{\lfloor \frac{l}{2} \rfloor}^*$. From (31) we get that $d_{2D_{r_l}^*}^{*,2(s+1),3s}(2r_0) = d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0) = d_{2(s+1),3s}^*(2r_0)$. Hence for the symmetric case we get

$$\min \left(d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0 + \epsilon), d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0 - \epsilon), d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0) \right) = d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0 + \epsilon) < d_{2(s+1),3s}^*(2r_0). \quad (41)$$

Since $s < r_0 < s + \frac{1}{2}$ is not an anchor point, we get from Corollary 1 and (31) that $d_{D_1+D_2}^{*,2(s+1),3s}(2r_0) = d_{2(s+1),3s}^*(2r_0)$ if and only if $D_1 + D_2 = 2D_{r_l}^* = 2D_{\lfloor \frac{l}{2} \rfloor}^*$. Hence, in order for the second term in (40) to attain the optimal DMT of finite constellations, we must choose

$$D_1 + D_2 = 2D_{\lfloor \frac{l}{2} \rfloor}. \quad (42)$$

From (33), (41) we know that

$$d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,s+1,3s}(r_0 + \epsilon) < d_{2(s+1),3s}^*(2r_0) < d_{D_{\lfloor \frac{l}{2} \rfloor+1}^*}^{*,s+1,3s}(r_0 + \epsilon). \quad (43)$$

Hence from Corollary 1 we can deduce that there must exist $D' = D_{\lfloor \frac{l}{2} \rfloor} + \epsilon'$, where $0 < \epsilon' < D_{\lfloor \frac{l}{2} \rfloor+1} - D_{\lfloor \frac{l}{2} \rfloor}$, such that

$$d_{D'}^{*,s+1,3s}(r_0 + \epsilon) = d_{2(s+1),3s}^*(2r_0). \quad (44)$$

We divide the assignment of D_1 into several cases. For the case $0 < D_1 < D'$ we get from Corollary 1 and the fact that $s < r_0 + \epsilon < s + \frac{1}{2}$ is not an anchor point

$$d_{D_1}^{*,s+1,3s}(r_0 + \epsilon) < d_{D'}^{*,s+1,3s}(r_0 + \epsilon) = d_{2(s+1),3s}^*(2r_0). \quad (45)$$

Hence in this range the optimal DMT of finite constellations is not obtained. For the case $D_1 = D' = D_{\lfloor \frac{l}{2} \rfloor} + \epsilon'$, we have shown (44) that $d_{D'}^{*,s+1,3s}(r_0 + \epsilon)$ equals to the optimal DMT of finite constellations. According to (42) we need to assign $D_2 = D'' = D_{\lfloor \frac{l}{2} \rfloor} - \epsilon'$ in order to get

$$d_{D'}^{*,s+1,3s}(r_0 + \epsilon) = d_{2D_{\lfloor \frac{l}{2} \rfloor}}^{*,2(s-1),3s}(2r_0) = d_{2(s+1),3s}^*(2r_0).$$

So far we have shown that the first two terms in (40) can attain the optimal DMT of finite constellations for $D_1 = D'$. We are left with the third term that equals to the straight line $d_{D''}^{*,s-1,3s}(r)$. We consider two cases. For the first case we assume $D'' \leq r_0 - \epsilon$. In this case we get

$$d_{D''}^{*,s-1,3s}(r_0 - \epsilon) = 0 < d_{2(s-1),3s}^*(2r_0). \quad (46)$$

For the second case we assume $D'' > r_0 - \epsilon$. From symmetry considerations it can be easily shown that the straight line $d'(r)$ that fulfils $d'(s) = d_{s+1,3s}^*(s) = d_{D'}^{*,s-1,3s}(s)$ and $d'(D'') = 0$, also fulfills

$$d'(r_0 - \epsilon) = d_{D'}^{*,s-1,3s}(r_0 + \epsilon) = d_{2(s-1),3s}^*(2r_0). \quad (47)$$

Since $D'' < D_{\lfloor \frac{l}{2} \rfloor}$, according to Corollary 1 we get

$$d_{D''}^{*,s-1,3s}(s) < d_{D_{\lfloor \frac{l}{2} \rfloor}}^{*,s-1,3s}(s) = d'(s). \quad (48)$$

Since $d_{D''}^{*,s-1,3s}(D'') = d'(D'') = 0$ and these are straight lines we get

$$d_{D''}^{*,s-1,3s}(r) < d'(r) \quad 0 < r < D'' \quad (49)$$

and so according to (46)

$$d_{D''}^{*,s-1,3s}(r_0 - \epsilon) < d'(r_0 - \epsilon) = d_{2(s-1),3s}^*(2r_0). \quad (50)$$

Thus, the third term in (40) is smaller than the optimal DMT of finite constellations. Finally, we consider the case $D_1 > D'$. For this case we get $D_2 < D'' < D_{\lfloor \frac{l}{2} \rfloor}$, which according to Corollary 1 leads to

$$d_{D_2}^{*,s-1,3s}(r_0 - \epsilon) < d_{D''}^{*,s-1,3s}(r_0 - \epsilon) < d_{2(s-1),3s}^*(2r_0). \quad (51)$$

From (45),(46), (50) and (51) we have proved that

$$\max_{(D_1, D_2)} \min \left(d_{D_1}^{*,s+1,3s}(r_0 + \epsilon), d_{D_1+D_2}^{*,2(s+1),3s}(2r_0), d_{D_2}^{*,s+1,3s}(r_0 - \epsilon) \right) < d_{2(s-1),3s}^*(2r_0). \quad (52)$$

Therefore, based on (40) we have proved (27). This concludes the proof. $\blacksquare$

D. Discussion: Sub-optimality for $N < (K+1)M - 1$

We wish to understand the reasons for the sub-optimality of the unconstrained multiple-access channels for the case $N < (K+1)M - 1$. For this reason we go back and observe the results we obtained in Theorem 4 and Lemma 6 for the optimal DMT of IC's in the symmetric case. First note that the upper bound on the optimal DMT of IC's in the symmetric case is a convex function. This can be shown rather easily. The convexity argument is based on the fact that a function that equals to the maximum between straight lines is convex. For $N \geq (K+1)M - 1$, the optimal DMT of IC's in the symmetric case is simply upper bounded by $d_{M,N}^*(r)$ which is a maximization between straight lines, and therefore is a convex function. For the case $N < (K-1)M + 1$ the upper bound on the optimal DMT of IC's in the symmetric case is a straight line. Finally, for $N = (K-1)M + 1 + l$, where $l = 0, \dots, 2M - 3$, the upper bound on the optimal symmetric DMT of IC's equals to the maximization between the first $\lfloor \frac{l}{2} \rfloor + 1$ straight lines constituting $d_{M,N}^*(r)$, $d^*(r)$, and the last $M - \lfloor \frac{l+1}{2} \rfloor$ straight lines constituting $d_{K \cdot M, N}^*(K \cdot r)$.

On the other hand the optimal DMT of finite constellations in the symmetric case is not necessarily a convex function. See figure 4 for illustration. For $N < (K-1)M + 1$ we get $\frac{MN}{N+M-1} > \frac{N}{K}$, and so $d_{M,N}^*(\frac{N}{K}) > 0$. Based on this fact and on the fact that $d_{K \cdot M, N}^{*,(FC)}(\frac{N}{K}) = 0$, where $d_{K \cdot M, N}^{*,(FC)}(r)$ is a piecewise linear function, we get for this case that $d_{K \cdot M, N}^{*,(FC)}(r)$ is not a convex function. For the case $N = (K-1)M + 1 + l$, where $l = 0, \dots, 2M - 3$ we know that

$$d_{K \cdot M, N}^*(r) = d^*(r) < d_{K \cdot M, N}^{*,(FC)}(r) \quad \lfloor \frac{l}{2} \rfloor + 1 < r < \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}.$$

Since $d^*(r)$ is a straight line it necessarily means that $d_{K \cdot M, N}^{*,(FC)}(r)$ is not a convex function whenever $\lfloor \frac{l}{2} \rfloor + 1 \neq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. For the case $\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ we get $d_{K \cdot M, N}^{*,(FC)}(r) = d_{K \cdot M, N}^*(r)$, and so in this case the optimal DMT of finite constellations in the symmetric case is also a convex function. Therefore, *whenever the optimal DMT of finite constellations in the symmetric case is not a convex function, the optimal DMT of IC's is inferior.*

For the symmetric case, the optimal solution requires to assign the same average number of dimensions per channel use for each user. Let us first consider the case $N < (K-1)M + 1$. In this case the maximal average number of dimensions per channel use each user can receive is $\frac{N}{K} < \frac{MN}{N+M-1}$. Hence for this case we get a “dimension mismatch” between the maximal average number of dimensions per channel use that can be assigned for each user, and the average number of dimensions per channel use per user required to attain the first line of $d_{M,N}^*(r)$. This dimension mismatch leads to the sub-optimality in this case, illustrated on Figure 3.

For $N = (K-1)M + 1 + l$, where $l = 0, \dots, 2M - 3$, let us consider the cases where $\lfloor \frac{l}{2} \rfloor + 1 \neq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. Let us first consider the range $\lfloor \frac{l}{2} \rfloor + 1 < r < \frac{N}{K+1}$. In this range the optimal DMT of finite constellations in the symmetric case is $d_{M,N}^*(r)$. On the other hand the upper bound on the optimal DMT of IC's in the symmetric case equals in this range to $d^*(r) < d_{M,N}^*(r)$ obtained for average number of dimensions per channel use per user D_l . The dimension mismatch in this case manifests itself in the fact that if we would increase the average number of dimension per channel use per user to the values corresponding to any of the straight lines constituting $d_{M,N}^*(r)$ in the range $\lfloor \frac{l}{2} \rfloor + 1 \neq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$, then we would get DMT smaller than $d^*(r)$ due to $d_{K \cdot D}^{*,K \cdot M, N}(K \cdot r)$. For the second range $\frac{N}{K+1} \leq r < \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ the the optimal DMT

of finite constellations in the symmetric case is $d_{K,M,N}^*(K \cdot r)$, where again the upper bound on the optimal DMT of IC's in the symmetric case equals $d^*(r) < d_{K,M,N}^*(K \cdot r)$. In this range the dimensions mismatch manifests itself in the fact that if we would decrease the total average number of dimensions per channel use to the values corresponding to the straight lines constituting $d_{K,M,N}^*(K \cdot r)$ in this range, then we would get DMT smaller than $d^*(r)$ due to $d_D^{*,M,N}(r)$.

For the case $N = (K - 1)M + 1 + l$, $l = 0, \dots, 2M - 3$ and $\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ the upper bound on the optimal DMT of IC's in the symmetric case coincides with the optimal DMT of finite constellations in the symmetric case. However, in this case we show that there exist multiplexing gain tuples for which increasing the average number of dimensions per channel use of the first user by a certain amount, and decreasing the average number of dimensions per channel use of the other user by the same amount, does not have a symmetric effect. This leads to sub-optimality compared to the optimal DMT of finite constellations. This principle is illustrated in Figure 6.

Finally, a question that may arise is whether it is possible to find an extension of orthogonal designs [10] to the multiple-access channels, i.e. a transmission scheme that enables to separate the space-time code from the symbols required for transmission. The most notable example of such a transmission scheme is the Alamouti scheme [11] for the case of two transmit antennas and a single receive antenna. For example, in this case transmitting the information itself over the space-time code enables to obtain the optimal DMT $d_{2,1}^*(r)$ regardless of the constellation size. For the multiple-access channels, if we examine the optimal DMT of finite constellations for the symmetric case, for $M = 2$, $K = 2$ and $N = 1$ we get

$$d_{2,2,1}^{*(FC)}(r) = \begin{cases} d_{2,1}^*(r) & 0 \leq r \leq \frac{1}{3} \\ d_{4,1}^*(2r) & \frac{1}{3} \leq r \leq \frac{1}{2} \end{cases}$$

which imply that in the range $0 \leq r \leq \frac{1}{3}$ each user can obtain the same performance as the Alamouti scheme. However, our results show that for this setting we get $N = 1 < (K - 1)M + 1 = 3$. Therefore, the optimal DMT of IC's for the symmetric case is upper bounded by

$$d_{2,2,1}^*(r) = d_{2,1}^*(2r)$$

which is strictly smaller than $d_{2,1}^*(r)$ except for $r = 0$. This leads us to the conclusion that for the multiple-access channels, the signals required for transmission effect the performance and can not be separated from the space-time code. This is due to the fact that when the constellation size is infinite, the performance is sub-optimal. Hence, in this sense there is no extension of orthogonal designs to the multiple-access channels. Figure 7 illustrates the aforementioned example.

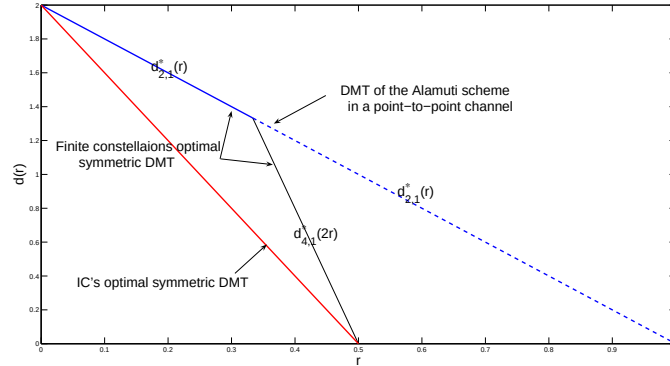


Fig. 7. Comparison between the optimal DMT of finite constellations in the symmetric case and the upper bound on the optimal DMT of IC's for the case $M = K = 2$ and $N = 1$. Note that in the range $0 \leq r \leq \frac{1}{3}$ finite constellations attain the Alamouti performance, while IC's can not obtain it. This illustrates that in the multiple-access channels the constellation and the space-time code can not be separated.

IV. ATTAINING THE OPTIMAL DMT FOR $N \geq (K + 1)M - 1$

In this section we show that the upper bound on the DMT of the unconstrained multiple-access channels, derived in section III, is achievable for the case $N \geq (K + 1)M - 1$ by a sequence of IC's in general and lattices in particular. Essentially, we show for $N \geq (K + 1)M - 1$ that IC's attain DMT that equals to

$$d_{M,N}^*(\max(r_1, \dots, r_K)) = d_{K,M,N}^{*(FC)}(r_1, \dots, r_K). \quad (53)$$

We begin by showing that simple orthogonal transmitting approaches such as time-division multiple-access (TDMA) or code-division multiple-access (CDMA) will result in sub-optimal performance for $N \geq (K + 1)M - 1$. Then we introduce the transmission scheme for each user and show the effective channel of the transmission scheme. Following that, we derive for each channel realization an upper bound on the error probability of the ML decoder of an ensemble of K IC's. This is

achieved by extending the methods derived in [7] for the AWGN channel, and in [12] for colored channels. Finally, we show the ML decoder of the proposed transmission scheme attains the optimal DMT for the case $N \geq (K + 1)M - 1$, by averaging the upper bound on the error probability over the channel realizations.

A. Orthogonal Transmission is Sub-optimal

In this subsection we show the sub-optimality of transmission methods that create in the receiver orthogonalization between different independent streams, for any channel realization. The advantage of these transmission schemes is their simplicity. By assigning the IC's or lattices correctly in the space, they enable to consider each stream independently and reduce the decoding problem to the point-to-point scenario. Such an approach is very natural when considering IC's in general and lattices in particular, as it involves assigning the streams with dimensions or subspaces that remain orthogonal in the receiver for each channel realization. The IC related to a certain stream lies within the assigned subspace. We show for $N \geq (K + 1)M - 1$ that such transmission method is sub-optimal as it requires each user to give up too many dimensions to create the orthogonalization.

We begin by showing the sub-optimality of orthogonal transmission schemes for $N \geq (K + 1)M - 1$. In the receiver, orthogonal transmission scheme enables each independent stream to lie in a subspace orthogonal to the other streams, for each channel realization. In order for a transmission scheme to fulfil this property, the streams must be assigned with orthogonal subspaces already in the transmitter, i.e. must be assigned with orthogonal subspaces in $\mathbb{C}^{MT}$ assuming there are T channel uses. Hence, orthogonal transmission schemes require the partition of at most M number of dimensions per channel use between *all* users. On the other hand, $N \geq (K + 1)M - 1$ leads to $N \geq K \cdot M$, and so in general the K users can transmit together up to KM dimensions per channel use. The optimal DMT for the symmetric case for $N \geq (K + 1)M - 1$ is $d_{M,N}^*(r)$. From Corollary 1 and Theorem 4 we know that in the range $M - 1 \leq r \leq M$ the optimal DMT is obtained only when each user transmits M average number of dimensions per channel use, i.e. the K users must transmit together KM dimensions per channel use. Hence, orthogonal transmission is not provided with enough dimensions per channel use to obtain the last line of the optimal DMT. This leads to its sub-optimality.

As a first example we consider an orthogonal transmission scheme that takes the natural partition to K streams induced by the multiple-access channels. In order to obtain orthogonalization for this case, a different user is transmitting in each channel use, while the others wait for their turn to transmit. This transmission method is referred to as TDMA. Let us consider the symmetric case where each user transmits with multiplexing gain r . Assuming there are T channel uses, in the symmetric case each user transmits only for $\frac{T}{K}$ channel uses. In this case each user can obtain the point-to-point performance of a channel with M transmit and N receive antennas, for $\frac{T}{K}$ channel uses. However, in order for each user to obtain multiplexing gain r per channel use, it must transmit at multiplexing gain Kr for $\frac{T}{K}$ channel uses, which leads to performance of $d_{M,N}^*(Kr)$. This shows the sub-optimality of TDMA.

Another transmission approach is assigning an independent stream for each transmit antenna. This is equivalent to considering a multiple-access channel with KM users, each with a single transmit antenna. Let us consider for example a multiple-access channel with $M = 1$, K users and $N \geq K$. In this case the optimal DMT for the symmetric case equals $d_{1,N}^*(r)$. On the other hand for CDMA each user is assigned with an orthogonal subspace in $\mathbb{C}^T$, assuming there are T channel uses. In this way each stream can obtain the performance of a point-to-point channel with a single transmit antenna and N receive antennas. However, for the orthogonalization to hold each user is assigned with $\frac{T}{K}$ dimensional subspace, which must be orthogonal to the other users subspaces. Hence, in order for each user to obtain multiplexing gain r per channel use, he must transmit at multiplexing gain Kr over the $\frac{T}{K}$ dimensional subspace. This leads to suboptimal performance of $d_{1,N}^*(Kr)$.

B. The Transmission Scheme

From subsection IV-A we get that an optimal transmission scheme must allow different users to lie in overlapping subspaces in the receiver, i.e. in the receiver the users can not reside in orthogonal subspaces. Essentially, in the proposed transmission scheme each user transmits as if the channel was a point-to-point channel with M transmit and N receive antennas. Hence, each user transmission matrix is identical to the transmission matrix presented in [6].

We denote the transmission matrix of user i by $G_l^{(i)}$, where $l = 0, \dots, M - 1$ and $i = 1, \dots, K$. $G_l^{(i)}$ has M rows that represent the transmission antennas, and $T_l = N + M - 1 - 2 \cdot l$ columns that represent the number of channel uses. $G_l^{(i)}$ transmits $D_l = \frac{NM - l(l+1)}{N + M - 1 - 2l}$ average number of dimensions per channel use in the following manner.

Consider a channel with M transmit and N receive antennas.

- 1) For $D_{M-1} = \frac{M(N-M+1)}{N-M+1} = M$: the matrix $G_{M-1}^{(i)}$ has $N - M + 1$ columns (channel uses). In the first column transmit symbols $x_1, \dots, x_M$ on the M antennas, and in the $N - M + 1$ column transmit symbols $x_{M(N-M)+1}, \dots, x_{M(N-M+1)}$ on the M antennas.
- 2) For D_l , $l = 0, \dots, L - 2$: the matrix $G_l^{(i)}$ has $M + N - 1 - 2 \cdot l$ columns. We add to $G_{l+1}^{(i)}$, the transmission scheme for D_{l+1} , two columns in order to get $G_l^{(i)}$. In the first added column transmit $l + 1$ symbols on antennas $1, \dots, l + 1$. In the second added column transmit different $l + 1$ symbols on antennas $M - l, \dots, M$.

According to the definition of the transmission scheme we can see that the different users transmit the same average number of dimensions per channel use. Let us denote the transmission scheme of the first k users by

$$G_l^{(1,\dots,k)} = \left(G_l^{(1)\dagger}, \dots, G_l^{(k)\dagger} \right)^\dagger \quad k = 1, \dots, K. \quad (54)$$

$G_l^{(1,\dots,k)}$ is a $k \cdot M \times T_l$ matrix. Note that $G_l^{(1,\dots,k)}$ transmits $k \cdot D_l T_l$ average number of dimensions per channel use.

Example: $M = 2$, $N = 5$ and $K = 2$. In this case the transmission scheme for $D_0 = \frac{10}{6}$, $D_1 = \frac{8}{4}$ ($G_0^{(1,2)}$, $G_1^{(1,2)}$ respectively) is as follows:

$$G_l^{(1,2)} = \left(\begin{array}{c} G_l^{(1)} \\ G_l^{(2)} \end{array} \right) = \underbrace{\left(\begin{array}{cccc|cc} x_1 & x_3 & x_5 & x_7 & x_{17} & 0 \\ x_2 & x_4 & x_6 & x_8 & 0 & x_{18} \\ \hline x_9 & x_{11} & x_{13} & x_{15} & x_{19} & 0 \\ x_{10} & x_{12} & x_{14} & x_{16} & 0 & x_{20} \end{array} \right)}_{\substack{D_1 = \frac{8}{4}, G_1^{(1,2)} \\ D_0 = \frac{10}{6}, G_0^{(1,2)}}} \quad (55)$$

C. The Effective Channel

Next we define the effective channel matrix induced by the transmission scheme of the first k users $G_l^{(1,\dots,k)}$, where $k = 1, \dots, K$. Let us denote the first k users transmission at time instance t by

$$\underline{x}_t = \left(\underline{x}_t^{(1)\dagger}, \dots, \underline{x}_t^{(k)\dagger} \right)^\dagger \quad t = 1, \dots, T_l.$$

In accordance with the channel model from (1) we get

$$\underline{y}_t = H^{(1,\dots,k)} \cdot \underline{x}_t \quad t = 1, \dots, T_l.$$

where $H^{(1,\dots,k)} = (H_1, \dots, H_k)$, is an $N \times k \cdot M$ matrix. The multiplication $H^{(1,\dots,k)} \cdot G_l^{(1,\dots,k)}$ yields a matrix with N rows and T_l columns, where each column equals to $H^{(1,\dots,k)} \cdot \underline{x}_t$, $t = 1 \dots T_l$. Each user is transmitting $D_l T_l$ -complex dimensional IC with $D_l T_l$ -complex symbols, i.e. $G_l^{(i)}$ has exactly $D_l T_l$ non-zero values representing the $D_l T_l$ complex-dimensional IC within $\mathbb{C}^{M T_l}$. Together, the first k users transmit an effective $k \cdot D_l T_l$ -dimensional complex IC within $\mathbb{C}^{k \cdot M T_l}$. For each column of $G_l^{(1,\dots,k)}$, denoted by $\underline{g}_m^{(k)}$, $m = 1 \dots T_l$, we define the effective channel that $\underline{g}_m^{(k)}$ sees as $\hat{H}_m$. It consists of the columns of $H^{(1,\dots,k)}$ that correspond to the non-zero entries of $\underline{g}_m^{(k)}$, i.e. $H^{(1,\dots,k)} \cdot \underline{g}_m^{(k)} = \hat{H}_m^{(k)} \cdot \hat{\underline{g}}_m^{(k)}$, where $\hat{\underline{g}}_m^{(k)}$ equals the non-zero entries of $\underline{g}_m^{(k)}$. As an example assume without loss of generality that the first l_m entries of $\underline{g}_m^{(k)}$ are not zero. In this case $\hat{H}_m$ is an $N \times l_m$ matrix equals to the first l_m columns of $H^{(1,\dots,k)}$. In accordance with (3), $H_{\text{eff}}^{(l),k}$ is an $N T_l \times k \cdot D_l T_l$ block diagonal matrix consisting of T_l blocks. Each block corresponds to the multiplication of $H^{(1,\dots,k)}$ with different column of $G_l^{(1,\dots,k)}$, i.e. $\hat{H}_m$ is the m 'th block of $H_{\text{eff}}^{(l),k}$. Note that in the effective matrix $N T_l \geq k \cdot D_l T_l$.

Next we elaborate on the structure of the blocks of $H_{\text{eff}}^{(l),k}$. For this reason we denote the columns of $H^{(1,\dots,k)}$ by $\underline{h}_m$, $m = 1, \dots, k \cdot M$. the transmission scheme has $N + M - 1 - 2 \cdot l$ columns. The entries of the first $N - M + 1$ columns of $G_l^{(1,\dots,k)}$, $\underline{g}_1^{(k)}, \dots, \underline{g}_{N-M+1}^{(k)}$ are all different from zero. Hence, the first $N - M + 1$ blocks of $H_{\text{eff}}^{(l),k}$ are

$$\hat{H}_m^{(k)} = H^{(1,\dots,k)} \quad m = 1, \dots, N - M + 1. \quad (56)$$

After the first $N - M + 1$ columns we have $M - 1 - l$ pairs of columns. For each pair we have

$$\begin{aligned} \hat{H}_{N-M+2v}^{(k)} &= \hat{H}_{N-M+2(v-1)}^{(k)} \setminus \{ \underline{h}_{M-(v-1)}, \underline{h}_{2M-(v-1)}, \dots, \underline{h}_{kM-(v-1)} \} \\ &= \{ \underline{h}_1, \dots, \underline{h}_{M-v}, \underline{h}_{M+1}, \dots, \underline{h}_{2M-v}, \dots, \underline{h}_{(k-1)M+1}, \dots, \underline{h}_{k \cdot M - v} \} \end{aligned} \quad (57)$$

and

$$\begin{aligned} \hat{H}_{N-M+2v+1}^{(k)} &= \hat{H}_{N-M+2(v-1)+1}^{(k)} \setminus \{ \underline{h}_v, \underline{h}_{v+M}, \dots, \underline{h}_{v+kM} \} \\ &= \{ \underline{h}_{v+1}, \dots, \underline{h}_M, \underline{h}_{M+v+1}, \dots, \underline{h}_{2M}, \dots, \underline{h}_{(k-1)M+v+1}, \dots, \underline{h}_{k \cdot M} \} \end{aligned} \quad (58)$$

where $v = 1, \dots, M - 1 - l$.

Example: consider $M = 2$, $N = 5$ and $K = 2$ as presented in (55). In this case $l = 0, 1$ and we have $D_0 = \frac{10}{6}$ and $D_1 = \frac{8}{4} = 2$ respectively. In addition $H^{(1,2)} = (H_1, H_2) = (\underline{h}_1, \underline{h}_2, \underline{h}_3, \underline{h}_4)$. We begin with $k = 1$. In this case we get a point-to-point channel with 2 transmit and 5 receive antennas $H^{(1)} = (\underline{h}_1, \underline{h}_2)$, which leads to the following effective channels

- 1) $D_1 = 2$: $H_{\text{eff}}^{(1),1}$ is generated from the multiplication of the 5×2 matrix $H^{(1)} = H_1$ with the four columns of the transmission matrix $G_1^{(1)}$. In this case $H_{\text{eff}}^{(1),1}$ is a 20×8 block diagonal matrix, consisting of four blocks, where each

$$H_{\text{eff}}^{(0),2} = \begin{pmatrix} H^{(1,2)} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & H^{(1,2)} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & H^{(1,2)} & \mathbf{0} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & H^{(1,2)} & \mathbf{0} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & (\underline{h}_1, \underline{h}_3) & \mathbf{0} \\ \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & \mathbf{0} & (\underline{h}_2, \underline{h}_4) \end{pmatrix} \quad (59)$$

block equals to H_1 .

- 2) $D_0 = \frac{10}{6}$: $H_{\text{eff}}^{(0),1}$ is a 30×10 block diagonal matrix consisting of six blocks. The first four blocks are equal to H_1 . The additional two blocks (multiplication with columns 5-6) are vectors. We get that $\hat{H}_5^{(1)} = \underline{h}_1$ and $\hat{H}_6^{(1)} = \underline{h}_2$.

For the case $k=2$ the effective channel induces by $G_l^{(1,2)}$ is as follows.

- 1) $D_1 = 2$: In this case the effective channel $H_{\text{eff}}^{(1),2}$ is a 20×16 matrix consisting of four blocks, where each block equals $H^{(1,2)} = (H_1, H_2)$.
- 2) $D_0 = \frac{10}{6}$: In this case the effective channel $H_{\text{eff}}^{(0),2}$ is a 30×20 matrix consisting of six blocks. The first four blocks equal to $H^{(1,2)}$. For the other two blocks $\hat{H}_5^{(2)} = (\underline{h}_1, \underline{h}_3)$ and $\hat{H}_6^{(2)} = (\underline{h}_2, \underline{h}_4)$.

We present $H_{\text{eff}}^{(0),2}$ of our example in equation (59).

Now we consider the rows of $G_l^{(1,\dots,k)}$. Each row of the transmission matrix is related to the column of $H^{(1,\dots,k)}$ that multiplies it, i.e. row j in $G_l^{(1,\dots,k)}$ corresponds to column $\underline{h}_j$. In case there is a non zero entry of row j in column m of $G_l^{(1,\dots,k)}$, it means that $\underline{h}_j$ occurs in $\hat{H}_m^{(k)}$. In the next lemma we examine the number of occurrences of a certain column of $H^{(1,\dots,k)}$ with certain other columns to its left. Let us define the sets $CL_j^0 = CL_j^1 = \{\underline{h}_1, \dots, \underline{h}_{j-1}\}$, $j = 1, \dots, k \cdot M$, which we will use in the following lemma.

Lemma 7. For any $k = 1, \dots, K$ consider column $\underline{h}_{a \cdot M + b}$, where $a = 0, \dots, k-1$ and $b = 1, \dots, M$. In this case $\underline{h}_{a \cdot M + b}$ occurs in the first $m = M + N - 1 + \min(l, M - b) + \min(l, b - 1)$ blocks of $H_{\text{eff}}^{(l),k}$. For $\hat{H}_m^{(k)}$, $m = 1, \dots, M + N - 1$, $\underline{h}_{a \cdot M + b}$ occurs with $\underline{h}_1, \dots, \underline{h}_{a \cdot M + b - 1}$ to its left. In addition, $\underline{h}_{a \cdot M + b}$ occurs in $\hat{H}_{N - M + 2v}^{(k)}$, $v = 1, \dots, \min(l, M - b)$ with $CL_{2v}^{(k)} = CL_{2(v-1)}^{(k)} \setminus \{\bigcup_{k=1}^a \underline{h}_{k \cdot M - v + 1}\}^1$ to its left. Finally, $\underline{h}_{a \cdot M + b}$ occurs in $\hat{H}_{N - M + 2v + 1}^{(k)}$, $v = 1, \dots, \min(l, b - 1)$ with $CL_{2v+1}^{(k)} = CL_{2(v-1)+1}^{(k)} \setminus \{\bigcup_{k=0}^a \underline{h}_{k \cdot M + v}\}$ to its left.

Proof: Straight forward from the definition of the blocks of $H_{\text{eff}}^{(l),k}$ in (56), (57) and (58). ■

D. Upper Bound on the Error Probability

In this subsection we derive for each channel realization an upper bound on the error probability of the joint ML decoder of K ensembles of IC's transmitted on the unconstrained multiple-access channels, assuming each IC is $D_l T_l$ -complex dimensional.

In accordance with the definitions in IV-C we denote the effective channel of any set of users pulled together by $H_{\text{eff}}^{(l),(s)}$, where $s \subseteq \{1, \dots, K\}^2$. We define $|H_{\text{eff}}^{(l),(s)\dagger} H_{\text{eff}}^{(l),(s)}| = \rho^{-\sum_{i=1}^{|s| \cdot D_l T_l} \eta_i^{(s)}}$, where $\rho^{-\frac{\eta_i^{(s)}}{2}}$ is the i 'th singular value of $H_{\text{eff}}^{(l),(s)}$, $1 \leq i \leq |s| \cdot D_l T_l$. We also define $\underline{\eta}^{(s)} = (\eta_1^{(s)}, \dots, \eta_{|s| \cdot D_l T_l}^{(s)})^T$. Note that in our setting $N T_l \geq K \cdot D_l T_l$.

Theorem 6. Consider K ensembles of $D_l T_l$ -complex dimensional IC's transmitted on the unconstrained multiple-access channels with effective channel $H_{\text{eff}}^{(l),K}$ and densities $\gamma_{tr}^{(i)} = \rho^{T_l r_i}$, $i = 1, \dots, K$. The average decoding error probability of the joint ML decoder is upper bounded by

$$\begin{aligned} \overline{Pe}(H_{\text{eff}}^{(l),K}, \rho) &\leq \sum_{s \subseteq \{1, \dots, K\}} \overline{Pe}(\underline{\eta}^{(s)}, \rho) = \sum_{s \subseteq \{1, \dots, K\}} D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| D_l - \sum_{i \in s} r_i) + \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \eta_i^{(s)}} \\ &= \sum_{s \subseteq \{1, \dots, K\}} D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| D_l - \sum_{i \in s} r_i)} \cdot |H_{\text{eff}}^{(l),(s)\dagger} H_{\text{eff}}^{(l),(s)}|^{-1} \end{aligned}$$

where $D(|s| \cdot D_l \cdot T_l)$ is a constant independent of ρ , $\eta_i^{(s)} \geq 0$ for $1 \leq i \leq |s| \cdot D_l T_l$ and any $s \subseteq \{1, \dots, K\}$.

Proof: We base our proof on the techniques developed by Poltyrev [7] for the AWGN channel and extended in [6] to colored channels in the point-to-point case. We begin by partitioning the error event into several disjoint events of errors for subsets of the users. We relate each of these error events to the point-to-point channel of the relevant users pulled together. Then we use the bounds derived in [6] to upper bound each of the error events probabilities.

¹Note that for the case $a = 0$, $\underline{h}_b$ has $\{\underline{h}_1, \dots, \underline{h}_{b-1}\}$ to its left.

²Note that in IV-C we considered the case of the first k users where $k = 1, \dots, K$. The extension to any $s \subseteq \{1, \dots, K\}$ is straight forward.

When the ML decoder makes an error it means that the decoded word is different from the transmitted signal for at least one of the users. Hence, we can break the error probability into the following disjoint events

$$\overline{Pe}(H_{\text{eff}}^{(l),K}, \rho) = \sum_{\forall s \subseteq \{1, \dots, K\}} \overline{Pe}(H_{\text{eff}}^{(l),(s)}, \rho) \quad (60)$$

where $\overline{Pe}(H_{\text{eff}}^{(l),(s)}, \rho)$ is the probability of error to words that induce error on the users related to s . We wish to upper bound $\overline{Pe}(H_{\text{eff}}^{(l),(s)}, \rho)$ for any $s \subseteq \{1, \dots, K\}$.

Based on [7] we have the following upper bound on the error probability of the joint ML decoder when transmitting $\underline{x}' \in S_{K \cdot D_l \cdot T_l}$

$$Pe(\underline{x}') \leq Pr(\|\tilde{\underline{n}}_{\text{ex}}\| \geq R) + \sum_{\underline{l} \in \text{Ball}(\underline{x}', 2R) \cap S_{K \cdot D_l \cdot T_l}, \underline{l} \neq \underline{x}'} Pr(\|\underline{l} - \underline{x}' - \tilde{\underline{n}}_{\text{ex}}\| < \|\tilde{\underline{n}}_{\text{ex}}\|) \quad (61)$$

where $S_{K \cdot D_l \cdot T_l}$ is the K users $K \cdot D_l \cdot T_l$ -complex dimensional effective IC, $\text{Ball}(\underline{x}', 2R)$ is a $K \cdot D_l \cdot T_l$ -complex dimensional ball of radius $2R$ centered around $\underline{x}'$, and $\tilde{\underline{n}}_{\text{ex}}$ is the effective noise in the $K \cdot D_l \cdot T_l$ -complex dimensional hyperplane where the effective IC resides. For the event of decoding words that lead to an error in the users related to $s \subseteq \{1, \dots, K\}$ (60), we can consider the error probability of $\underline{x}'$ to words that are different from $\underline{x}'$ only in the entries of the users related to s . From the expressions in (61) we get that this is equivalent to the error probability of a word $\underline{x}'' \in S_{|s| \cdot D_l \cdot T_l}$, where $\underline{x}''$ equals to $\underline{x}'$ in the entries of the users related to s , and $S_{|s| \cdot D_l \cdot T_l}$ is related to the words that lead to an error for these users. The probability of error for this event is upper bounded by

$$Pr(\|\tilde{\underline{n}}_{\text{ex}}'\| \geq R') + \sum_{\underline{l} \in \text{Ball}(\underline{x}'', 2R') \cap S_{|s| \cdot D_l \cdot T_l}, \underline{l} \neq \underline{x}''} Pr(\|\underline{l} - \underline{x}'' - \tilde{\underline{n}}_{\text{ex}}'\| < \|\tilde{\underline{n}}_{\text{ex}}'\|) \quad (62)$$

where $\text{Ball}(\underline{x}'', 2R')$ is a $|s| \cdot D_l \cdot T_l$ -complex dimensional ball of radius $2R'$ centered around $\underline{x}''$, and $\tilde{\underline{n}}_{\text{ex}}'$ is the effective noise in the $|s| \cdot D_l \cdot T_l$ -complex dimensional hyperplane where $S_{|s| \cdot D_l \cdot T_l}$ resides.

Next we upper bound the average decoding error probability of an ensemble of finite constellations, which later we will extend to ensemble of IC's. Note that the upper bounds on the error probability of IC's in (60), (61) also apply to finite constellations. Assume user j code-book contains $\lfloor \gamma_{\text{tr}}^{(j)} b^{2D_l T_l} \rfloor$ words, where each word is drawn uniformly within $\text{cube}_{D_l T_l}(b)$, $j = 1, \dots, K$. Recall from II that $\gamma_{\text{tr}}^{(j)} = \rho^{T r_j}$. According to the channel model in (3), the K users constitute together an ensemble drawn uniformly within $\text{cube}_{K \cdot D_l \cdot T_l}(b)$ of $\prod_{j=1}^K \lfloor \gamma_{\text{tr}}^{(j)} b^{2D_l T_l} \rfloor$ words. In fact each subset of the users, $s \subseteq \{1, \dots, K\}$, corresponds to an ensemble of $\prod_{i \in s} \lfloor \gamma_{\text{tr}}^{(i)} b^{2D_l T_l} \rfloor$ words drawn uniformly within $\text{cube}_{|s| \cdot D_l \cdot T_l}(b)$. Since the ML decoder decides on the word with minimal Euclidean distance from the observation, we get in the ensemble that the probability of the event of error for users related to $s \subseteq \{1, \dots, K\}$ is equivalent to the average decoding error probability of the ensemble consisting of $\prod_{i \in s} \lfloor \gamma_{\text{tr}}^{(i)} b^{2D_l T_l} \rfloor$ words drawn uniformly within $\text{cube}_{|s| \cdot D_l \cdot T_l}(b)$, with effective channel $H_{\text{eff}}^{(l),(s)}$. In [6, Theorem 3] an upper bound on the average decoding error probability of this ensemble was derived. By choosing for $s \subseteq \{1, \dots, K\}$

$$R_{(s)}^2 = R_{\text{eff}}^2 = \frac{2|s| \cdot D_l \cdot T_l}{2\pi e} \rho^{-\frac{\sum_{i \in s} r_i}{|s| \cdot D_l} - \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \frac{\eta_i^{(s)}}{|s| \cdot D_l \cdot T_l}}$$

we get for the ensemble the following upper bound on the probability of error for users related to s

$$\overline{Pe}^{FC(s)}(\rho, \underline{\eta}^{(s)}) \leq D'(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| \cdot D_l - \sum_{i \in s} r_i) + \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \eta_i^{(s)}} \quad \forall s \subseteq \{1, \dots, K\} \quad (63)$$

where $D'(|s| \cdot D_l \cdot T_l) \geq 1$ and $\eta_i^{(s)} \geq 0$, $i = 1, \dots, |s| \cdot D_l \cdot T_l$.

So far we upper bounded the probability of error for the users related to s for ensemble of finite constellations, where $s \subseteq \{1, \dots, K\}$. Now we extend this ensemble of finite constellations to ensemble of IC's with density $\gamma_{\text{tr}}^{(j)}$ for user j , where $j = 1, \dots, K$. We show that extending the ensemble of finite constellations to ensemble of IC's does not change the upper bound on the error probability. Let us consider for user j a certain finite constellation from the ensemble $C_0^j(\rho, b) \subset \text{cube}_{D_l T_l}(b)$. In accordance, for the ensemble of users relates to s let us denote a certain finite constellation from the effective ensemble by $C_0^{(s)}(\rho, b) \subset \text{cube}_{|s| \cdot D_l T_l}(b)$. We extend each finite constellation into IC by extending each user finite constellation in the following manner

$$IC^j(\rho, D_l T_l) = C_0^j(\rho, b) + (b + b') \cdot \mathbb{Z}^{2D_l T_l} \quad (64)$$

where without loss of generality ³ we assumed that $\text{cube}_{D_l T_l}(b) \in \mathbb{C}^{D_l T_l}$. For the users related to $s \subseteq \{1, \dots, K\}$

$$IC^{(s)}(\rho, |s| \cdot D_l \cdot T_l) = C_0^{(s)}(\rho, b) + (b + b') \cdot \mathbb{Z}^{2|s| \cdot D_l \cdot T_l}. \quad (65)$$

³In case $\text{cube}_{D_l T_l}(b)$ is a rotated cube within $\mathbb{C}^{M \cdot T_l}$, then the replication is done according the corresponding $M \cdot T_l \times D_l \cdot T_l$ matrix with orthonormal columns.

In the receiver we get

$$IC^{(s)}(\rho, |s| \cdot D_l \cdot T_l, H_{\text{eff}}^{(l),(s)}) = H_{\text{eff}}^{(l),(s)} \cdot C_0(\rho, b) + (b + b') H_{\text{eff}}^{(l),(s)} \cdot \mathbb{Z}^{2|s| \cdot D_l \cdot T_l}. \quad (66)$$

By extending each finite constellation in the ensemble into an IC according to the method presented in (65), (66) we get a new ensemble of IC's. We would like to set b and b' to be large enough such that the ensemble average decoding error probability has the same upper bound as in (63), and the users densities are equal to $\gamma_{tr}^{(j)}$ up to a coefficient, where $j = 1, \dots, K$. First we would like to set a value for b' . For a word within the set $\{H_{\text{eff}}^{(l),(s)} \cdot C_0^{(s)}(\rho, b)\}$, increasing b' decreases the error probability inflicted by the codewords outside the set $\{H_{\text{eff}}^{(l),(s)} \cdot C_0^{(s)}(\rho, b)\}$, for any $s \subseteq \{1, \dots, K\}$. In [6, Theorem 3] we have shown that for any $\eta_i^{(s)} \geq 0$, by choosing $b' = \sqrt{\frac{|s| \cdot D_l T_l}{\pi e}} \rho^{\frac{T_l}{2}(|s| \cdot D_l - \sum_{i \in s} r_i) + \epsilon}$, where $\epsilon > 0$, we get for $\rho \geq 1$

$$\begin{aligned} \overline{Pe}(H_{\text{eff}}^{(l),(s)}, \rho) &= E_{C_0}(P_e^{IC}(H_{\text{eff}}^{(l),(s)} \cdot C_0)) = E_{C_0}(P_e^{FC}(H_{\text{eff}}^{(l),(s)} \cdot C_0)) \\ &\quad + (b + b') H_{\text{eff}}^{(l),(s)} \cdot \mathbb{Z}^{2|s| \cdot D_l \cdot T_l} \leq D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| \cdot D_l - \sum_{i \in s} r_i) + \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \eta_i^{(s)}} \end{aligned} \quad (67)$$

where $E_{C_0}(P_e^{FC}(H_{\text{eff}}^{(l),(s)} \cdot C_0)) = \overline{P_e^{FC}}(\underline{\eta}^{(s)}, \rho)$, $E_{C_0}(P_e^{IC}(H_{\text{eff}}^{(l),(s)} \cdot C_0))$ is the average decoding error probability of the ensemble of IC's defined in (66), and $D(|s| \cdot D_l \cdot T_l) \geq D'(|s| \cdot D_l \cdot T_l)$.

Next, we set the value of b to be large enough such that for each user, each IC density from the ensemble in (66), $\gamma_{rc}^{'(j)}$, equals $\gamma_{rc}^{(j)}$ up to a factor of 2, where $j = 1, \dots, K$. By choosing $b = b' \cdot \rho^\epsilon$ we get

$$\gamma_{tr}^{'(j)} = \gamma_{tr}^{(j)} \cdot \left(\frac{b}{b + b'}\right)^{2D_l T_l} = \gamma_{tr}^{(j)} \cdot \frac{1}{1 + \rho^{-\epsilon}}.$$

Hence, for $\rho \geq 1$ we get

$$\frac{1}{2} \gamma_{tr}^{(j)} \leq \gamma_{tr}^{'(j)} \leq \gamma_{tr}^{(j)}. \quad (68)$$

As a result we also get

$$\mu_{tr}^{(j)} \leq \mu_{tr}^{'(j)} = \frac{(\gamma_{tr}^{'(j)})^{-\frac{1}{D_l T_l}}}{2\pi e \sigma^2} \leq 2\mu_{tr}^{(j)}.$$

Hence, from (60) and (67) we get that

$$\overline{Pe}(H_{\text{eff}}^{(l),K}, \rho) \leq \sum_{s \subseteq \{1, \dots, K\}} D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| \cdot D_l - \sum_{i \in s} r_i)} \cdot |H_{\text{eff}}^{(l),(s)}|^{-1} \quad (69)$$

and from (68) we get that user j has multiplexing gain r_j as required, where $j = 1, \dots, K$. This concludes the proof. $\blacksquare$

We wish to emphasize that the constraint of $\eta_i^{(s)} \geq 0$, for $i = 1, \dots, |s| \cdot D_l \cdot T_l$ and for any $s \subseteq \{1, \dots, K\}$ results from the fact that the *same* ensemble is upper bounded for *any* channel realization. In cases where it is possible to fit an ensemble to each channel realization, i.e. the case where the transmitter knows the channel, the upper bound applies also without this restriction.

E. Achieving the Optimal DMT

In this subsection we show that the transmission scheme proposed in IV-B attains the optimal DMT for $N \geq (K + 1)M - 1$, which equals to $d_{M,N}(\min(r_1, \dots, r_K))$. We base the proof on the upper bound on the error probability derived in Theorem 6. This upper bound consists of the sum of several terms (69), one for each $s \subseteq \{1, \dots, K\}$. Each of these terms depends on the determinant of its corresponding effective channel $|H_{\text{eff}}^{(l),(s)}|^{-1}$. For each term (for each s) we upper bound this determinant (different upper bounds than the bounds used in [6]) to get a new upper bound on the error probability. We average these upper bounds over all channels realizations and show it obtains the optimal DMT.

We wish to emphasize that in this subsection we show that each term (69), corresponding to a certain $s \subseteq \{1, \dots, K\}$, can be viewed as the error probability of a point-to-point channel with $|s| \cdot M$ transmit antennas and N receive antennas, while transmitting an $|s| \cdot D_l \cdot T_l$ -complex dimensional IC in the method described in IV-B. For the terms where $|s| = 1$ we get the required optimal DMT since each user uses an optimal transmission scheme for the point-to-point channel with M transmit and N receive antennas. However, for the terms where $1 < |s| \leq K$ the effective transmission scheme is no longer optimal and does not necessarily attains the optimal DMT for a point-to-point channel with $|s| \cdot M$ transmit antennas and N receive antennas. In fact it does not even necessarily attains $d_{|s| \cdot D_l}^{*, |s| \cdot M, N}(\max(r_1, \dots, r_K))$. Hence, the challenge in this subsection is to upper bound the DMT of these terms and show that although not optimal for the corresponding point-to-point channel, they are still good enough to obtain the optimal DMT for the case $N \geq (K + 1)M - 1$.

The average decoding error probability equals to the average over all channel realizations, i.e.

$$\overline{Pe}(\rho) = E_H \left(\overline{Pe} \left(H_{\text{eff}}^{(l),K}, \rho \right) \right). \quad (70)$$

Based on Theorem 6 we get the following upper bound on the average decoding error probability

$$\overline{Pe}(\rho) \leq \sum_{s \subseteq \{1, \dots, K\}} E_H \left(D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s|D_l - \sum_{i \in s} r_i)} \cdot |H_{\text{eff}}^{(l), (s) \dagger} H_{\text{eff}}^{(l), (s)}|^{-1} \right). \quad (71)$$

Since $E_H \left(|H_{\text{eff}}^{(l), (s) \dagger} H_{\text{eff}}^{(l), (s)}|^{-1} \right)$ is identical for any $|s| = k$ where $k = 1, \dots, K$, we get the following upper bound on the error probability

$$\overline{Pe}(\rho) \leq \sum_{s \subseteq \{1, \dots, K\}} D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s|D_l - \sum_{i \in s} r_i)} \cdot E_H \left(|H_{\text{eff}}^{(l), |s| \dagger} H_{\text{eff}}^{(l), |s|}|^{-1} \right). \quad (72)$$

where $H_{\text{eff}}^{(l), |s|} = H_{\text{eff}}^{(l), (1, \dots, |s|)}$ is the effective channel of the first $|s|$ users.

The channel matrix H consists of $N \cdot K \cdot M$ i.i.d entries, where each entry has distribution $h_{i,j} \sim CN(0, 1)$, $1 \leq i \leq N$ and $1 \leq j \leq K \cdot M$. Without loss of generality we consider the case where the columns of H are drawn sequentially from left to right, i.e. $\underline{h}_1$ is drawn first, then $\underline{h}_2$ is drawn et cetera. Column $\underline{h}_j$ is an N -dimensional vector. Given $\underline{h}_1, \dots, \underline{h}_{j-1}$, we can write

$$\underline{h}_j = \Theta(\underline{h}_1, \dots, \underline{h}_{j-1}) \cdot \tilde{\underline{h}}_j$$

where $\Theta(\cdot)$ is an $N \times N$ unitary matrix. $\Theta(\cdot)$ is chosen such that:

- 1) The first element of $\tilde{\underline{h}}_j$, $\tilde{h}_{1,j}$, is in the direction of $\underline{h}_{j-1}$.
- 2) The second element, $\tilde{h}_{2,j}$, is in the direction orthogonal to $\underline{h}_{j-1}$, in the hyperplane spanned by $\{\underline{h}_{j-1}, \underline{h}_{j-2}\}$.
- 3) Element $\tilde{h}_{j-1,j}$ is in the direction orthogonal to the hyperplane spanned by $\{\underline{h}_2, \dots, \underline{h}_{j-1}\}$ inside the hyperplane spanned by $\{\underline{h}_1, \dots, \underline{h}_{j-1}\}$.
- 4) The rest of the $N - j + 1$ elements are in directions orthogonal to the hyperplane $\{\underline{h}_1, \dots, \underline{h}_{j-1}\}$.

Note that $\tilde{h}_{i,j}$, $1 \leq i \leq N$, $1 \leq j \leq K \cdot M$ are i.i.d random variables with distribution $CN(0, 1)$. Let us denote by $\underline{h}_{j \perp j-1, \dots, j-k}$ the component of $\underline{h}_j$ which resides in the $N - k$ subspace which is perpendicular to the space spanned by $\{\underline{h}_{j-1}, \dots, \underline{h}_{j-k}\}$. In this case we get

$$\|\underline{h}_{j \perp j-1, \dots, j-k}\|^2 = \sum_{i=k+1}^N |\tilde{h}_{i,j}|^2 \quad 1 \leq k \leq j-1. \quad (73)$$

If we assign $|\tilde{h}_{i,j}|^2 = \rho^{-\xi_{i,j}}$, we get that the probability density function (PDF) of $\xi_{i,j}$ is

$$f(\xi_{i,j}) = C \cdot \log \rho \cdot \rho^{-\xi_{i,j}} \cdot e^{-\rho^{-\xi_{i,j}}} \quad (74)$$

where C is a normalization factor. In our analysis we assume a very large value for ρ . Hence we can neglect events where $\xi_{i,j} < 0$ since in this case the PDF (74) decreases exponentially as a function of ρ . For a very large ρ , $\xi_{i,j} \geq 0$, $1 \leq i \leq N$ and $1 \leq j \leq K \cdot M$, the PDF takes the following form

$$f(\xi_{i,j}) \propto \rho^{-\xi_{i,j}} \quad \xi_{i,j} \geq 0. \quad (75)$$

In this case by assigning in (73) the vector $\underline{\xi}_j = (\xi_{1,j}, \dots, \xi_{N,j})^T$, whose PDF is proportional to $\rho^{-\sum_{i=1}^N \xi_{i,j}}$, we get

$$\|\underline{h}_{j \perp j-1, \dots, j-k}\|^2 \doteq \rho^{-\min_{s \in \{k+1, \dots, N\}} \xi_{s,j}} \quad (76)$$

where $1 \leq k \leq j-1$. In addition

$$\|\underline{h}_j\|^2 \doteq \rho^{-\min_{s \in \{1, \dots, N\}} \xi_{s,j}}. \quad (77)$$

As presented in (72), in order to calculate the upper bound on the error probability we need to consider only the effective channel of the first $|s|$ users, $1 \leq |s| \leq K$. Hence, to obtain an upper bound on the error probability we wish to lower bound the contribution of a certain column in the channel matrix, $\underline{h}_j$ to the determinant $|H_{\text{eff}}^{(l), |s| \dagger} H_{\text{eff}}^{(l), |s|}|$. $H_{\text{eff}}^{(l), |s|}$ is a block diagonal matrix. Hence the determinant of $|H_{\text{eff}}^{(l), |s| \dagger} H_{\text{eff}}^{(l), |s|}|$ can be expressed as

$$|H_{\text{eff}}^{(l), |s| \dagger} H_{\text{eff}}^{(l), |s|}| = \prod_{i=1}^{T_l} |\hat{H}_i^{(|s|) \dagger} \hat{H}_i^{(|s|)}|. \quad (78)$$

Assume $\hat{H}_i^{(|s|)} = (\hat{\underline{h}}_1, \dots, \hat{\underline{h}}_m)$, i.e. $\hat{H}_i^{(|s|)}$ has m columns. In this case we can state that the determinant

$$|\hat{H}_i^{(|s|) \dagger} \hat{H}_i^{(|s|)}| = \|\hat{\underline{h}}_1\|^2 \|\hat{\underline{h}}_{2 \perp 1}\|^2 \dots \|\hat{\underline{h}}_{m \perp m-1, \dots, 1}\|^2.$$

Note that $\hat{H}_i^{(|s|)}$ has more rows than columns. The columns of $\hat{H}_i^{(|s|)}$ are subset of the columns of the channel matrix H . Hence, in order to quantify the contribution of $\underline{h}_j$ to the determinant we need to consider the blocks where it occurs. We know

that the contribution of $\underline{h}_j$ to those determinants can be quantified by taking into account the columns to its left in each block, i.e. by taking into account $\{\underline{h}_1, \dots, \underline{h}_{j-1}\}$.

Based on (76) and (77) we can quantify the contribution of $\underline{h}_j$ to $|H_{\text{eff}}^{(l),|s|\dagger} H_{\text{eff}}^{(l),|s|}|$ by

$$\|\underline{h}_j\|^{2b_j^{(|s|)}(0)} \prod_{k=1}^{j-1} \|\underline{h}_{j \perp j-1, \dots, j-k}\|^{2b_j^{(|s|)}(k)} \doteq \rho^{-\sum_{k=0}^{j-1} b_j^{(|s|)}(k) \cdot \min_{s \in \{k+1, \dots, N\}} \xi_{s,j}} \quad (79)$$

where $b_j^{(|s|)}(k)$ is the number of occurrences of $\underline{h}_j$ in the blocks of $H_{\text{eff}}^{(l),|s|}$, with only $\{\underline{h}_{j-1}, \dots, \underline{h}_{j-k}\}$ to its left. $b_j^{(|s|)}(0)$ is the number of occurrences of $\underline{h}_j$ with no columns to its left. Hence, the determinant is obtained by multiplying the contribution of each column

$$|H_{\text{eff}}^{(l),|s|\dagger} H_{\text{eff}}^{(l),|s|}| = \prod_{j=1}^{|s| \cdot M} \|\underline{h}_j\|^{2b_j^{(|s|)}(0)} \prod_{k=1}^{j-1} \|\underline{h}_{j \perp j-1, \dots, j-k}\|^{2b_j^{(|s|)}(k)} \doteq \rho^{-\sum_{k=0}^{j-1} b_j^{(|s|)}(k) \cdot \min_{s \in \{k+1, \dots, N\}} \xi_{s,j}}. \quad (80)$$

Now we lower bound the determinant (80) by lower bounding the contribution of each column. Let us consider column $\underline{h}_{a \cdot M + b}$, $a = 0, \dots, |s| - 1$, $b = 1, \dots, M$. From Lemma 7 we know that $\underline{h}_{a \cdot M + b}$ occurs $N - M + 1$ times with $\{\underline{h}_1, \dots, \underline{h}_{a \cdot M + b - 1}\}$ to its left, i.e. $b_{a \cdot M + b}^{(|s|)}(a \cdot M + b - 1) = N - M + 1$. In addition, $\underline{h}_{a \cdot M + b}$ occurs in $\widehat{H}_{N-M+2v+1}^{(|s|)}$, $v = 1, \dots, \min(l, b - 1)$, with

$$\{\underline{h}_1, \dots, \underline{h}_{a \cdot M + b - 1}\} \setminus \left\{ \bigcup_{k=0}^a \underline{h}_{k \cdot M + 1}, \dots, \underline{h}_{k \cdot M + v} \right\} \quad (81)$$

to its left, i.e. when v is increased by one the number of columns is reduced by $a + 1$. Finally, $\underline{h}_{a \cdot M + b}$ occurs in $\widehat{H}_{N-M+2v}^{(|s|)}$, $v = 1, \dots, \min(l, M - b)$, with

$$\{\underline{h}_1, \dots, \underline{h}_{a \cdot M + b - 1}\} \setminus \left\{ \bigcup_{k=1}^a \underline{h}_{k \cdot M - v + 1}, \dots, \underline{h}_{k \cdot M} \right\}. \quad (82)$$

to its left (for $a = 0$ it occurs with $\{\underline{h}_1, \dots, \underline{h}_{b-1}\}$ to its left), i.e. when v is increased by one the number of columns is reduced by a . We wish to quantify the change in the determinant when reducing columns, and relate it to the PDF in (75). In order to do that we need to present the columns reduction sequentially. From (81) and (82) we can see that the columns reduction induced by the transmission scheme is not done sequentially. Hence, we wish to assume a sequential columns reduction that gives a lower bound on the determinant. We assume for $\widehat{H}_{N-M+2v}^{(|s|)}$, $v = 1, \dots, \min(l, M - b)$ that $\underline{h}_{a \cdot M + b}$ occurs with $\{\underline{h}_1, \dots, \underline{h}_{a \cdot M + b - 1}\}$ to its left instead of (82). In this case, by adding columns to (82) we get a lower bound on the contribution of $\underline{h}_{a \cdot M + b}$ to the determinant in each of its occurrences that equals to

$$\rho^{-\min_{s \in \{a \cdot M + b, \dots, N\}} \xi_{s, a \cdot M + b}} \quad v = 1 \dots, \min(l, M - b). \quad (83)$$

On the other hand for (81) we assume that only the left most column is reduced when increasing v , instead of the $a + 1$ columns. This leads to lower bound to the contribution of (81) to the determinant that equals to

$$\rho^{-\min_{s \in \{a \cdot M + b - v, \dots, N\}} \xi_{s, a \cdot M + b}} \quad v = 1 \dots, \min(l, b). \quad (84)$$

We get from this bound a sequential columns reduction since the set of columns corresponding to (84) is a subset of the set of columns corresponding to (83). Thus, from (83),(84) we get the following lower bound on the determinant

$$|H_{\text{eff}}^{(l),|s|\dagger} H_{\text{eff}}^{(l),|s|}| \geq \prod_{a=0}^{|s|-1} \prod_{b=1}^M \rho^{-(N-M+1+\min(l, M-b)) \min_{s \in \{a \cdot M + b, \dots, N\}} \xi_{s, a \cdot M + b}} \cdot \prod_{b'=2}^M \rho^{-\sum_{i=1}^{\min(l, b'-1)} \min_{s \in \{a \cdot M + b' - i, \dots, N\}} \xi_{s, a \cdot M + b'}}. \quad (85)$$

Now we are ready to lower bound the transmission scheme DMT. Let us denote the maximal multiplexing gain by $r_{\max} = \max(1, \dots, K)$ and also assume $l = \lfloor r_{\max} \rfloor$.

Theorem 7. Consider K sequences of ensembles of $D_l T_l$ -complex dimensional IC's transmitted over the unconstrained multiple-access channels, where each user transmits multiplexing-gain r_i using $G_{\lfloor r_{\max} \rfloor}^{(i)}$, $i = 1, \dots, K$. The DMT of this transmission scheme is lower bounded by $d_{M,N}^*(r_{\max})$.

Proof: In order to lower bound the DMT of the transmission scheme we use the upper bound on the average decoding error probability from Theorem 6 and the lower bound on the determinant of $|H_{\text{eff}}^{(l),|s|\dagger} H_{\text{eff}}^{(l),|s|}|$ (85), to get a new upper bound on the error probability. We average the new upper bound on the realizations of H to obtain the transmission scheme DMT.

First let us denote $l = \lfloor r_{\max} \rfloor$. Recall from Theorem 6 that the upper bound on the error probability applies when $\eta_i^{(s)} \geq 0$, for every $i = 0, \dots, |s| \cdot D_l \cdot T_l$ and for any $s \subseteq (1, \dots, K)$. In our analysis we assume that $\xi_{i,j} \geq 0$ for $i = 1, \dots, N$,

$j = 1, \dots, K \cdot M$. We wish to show that it leads to $\eta_i^{(s)} \geq 0$, i.e. we can use the upper bound on the error probability. We know that $H_{eff}^{(l),(s)}$ is a block diagonal matrix, where the set of columns of each block is a subset of $\{\underline{h}_1, \dots, \underline{h}_{K \cdot M}\}$. Let us denote the set of indices of the columns of H that take place in $H_{eff}^{(l),(s)}$ by $a(s)$. In this case we get from trace considerations From trace considerations we get

$$\sum_{i=1}^N \sum_{j \in a(s)} \rho^{-\xi_{i,j}} = \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \rho^{-\eta_i^{(s)}} \quad \forall s \subseteq \{1, \dots, K\}$$

which leads to

$$\sum_{i=1}^N \sum_{j \in a(s)} \rho^{-\xi_{i,j}} \doteq \sum_{i=1}^{|s| \cdot D_l \cdot T_l} \rho^{-\eta_i^{(s)}} \quad \forall s \subseteq \{1, \dots, K\}. \quad (86)$$

From (86) we get that $\xi_{i,j} \geq 0$ for $i = 1, \dots, N$, $j = 1, \dots, K \cdot M$ if and only if $\eta_i^{(s)} \geq 0$ for any $s \subseteq \{1, \dots, K\}$ and $i = 1, \dots, |s| \cdot D_l \cdot T_l$. Therefore, we can use the upper bound from Theorem 6.

The upper bound on the error probability consists of the sum of $\overline{Pe}(\underline{\eta}^{(s)}, \rho)$ for all $s \subseteq \{1, \dots, K\}$. We wish to show that the DMT of each of the terms is lower bounded by $d_{M,N}^*(r_{max})$. First note that $\forall s \subseteq \{1, \dots, K\}$ we can write

$$\begin{aligned} \overline{Pe}(\underline{\eta}^{(s)}, \rho) &= \min \left(1, D(|s| \cdot D_l \cdot T_l) \rho^{-T_l(|s| D_l - \sum_{i \in s} r_i)} \cdot |H_{eff}^{(l),(s)\dagger} H_{eff}^{(l),(s)}|^{-1} \right) \\ &\leq \min \left(1, D(|s| \cdot D_l \cdot T_l) \rho^{-|s| \cdot T_l (D_l - r_{max})} \cdot |H_{eff}^{(l),(s)\dagger} H_{eff}^{(l),(s)}|^{-1} \right) \end{aligned} \quad (87)$$

where the inequality comes from the fact that assuming all users transmit at the maximal multiplexing gain increases the error probability. By assigning $D_l = \frac{MN-l \cdot (l+1)}{N+M-1-2 \cdot l}$ and $T_l = N + M - 1 - 2 \cdot l$ we get

$$\overline{Pe}(\underline{\eta}^{(s)}, \rho) \leq \min \left(1, D(|s| \cdot D_l \cdot T_l) \rho^{-|s| \cdot (MN-l \cdot (l+1) - (N+M-1-2l) \cdot r_{max})} \cdot |H_{eff}^{(l),(s)\dagger} H_{eff}^{(l),(s)}|^{-1} \right). \quad (88)$$

From (72) we know that $E_H(\overline{Pe}(\underline{\eta}^{(s)}, \rho)) = E_H(\overline{Pe}(\underline{\eta}^{(1, \dots, |s|)}, \rho))$, i.e, the term corresponding to the first $|s|$ users. Hence, for all terms with the same $|s|$ we can consider

$$\overline{Pe}(\underline{\eta}^{(1, \dots, |s|)}, \rho) \leq \min \left(1, D(|s| \cdot D_l \cdot T_l) \rho^{-|s| \cdot (MN-l \cdot (l+1) - (N+M-1-2l) \cdot r_{max})} \cdot |H_{eff}^{(l),|s|\dagger} H_{eff}^{(l),|s|}|^{-1} \right). \quad (89)$$

Let us define

$$A(a \cdot M + b, l) = (N - b + 1) \min_{s \in \{aM+b, \dots, N\}} \xi_{s, aM+b} \quad (90)$$

for $b = 1, a = 0, \dots, |s| - 1$ and

$$A(a \cdot M + b, l) = (N - b + 1) \min_{s \in \{aM+b, \dots, N\}} \xi_{s, aM+b} + \sum_{i=1}^{\min(l, b-1)} \min_{s \in \{aM+b-i, \dots, N\}} \xi_{s, aM+b} \quad (91)$$

for $b = 2, \dots, M$ and $a = 0, \dots, |s| - 1$. Based on the bounds in (83), (84), (85) and since $N - M + 1 + \min(l, M - b) \leq N - b + 1$ we get that $\rho^{-A(a \cdot M + b, l)}$ gives a lower bound on the contribution of $\underline{h}_{a \cdot M + b}$ to the determinant. As a result we get the following upper bound

$$|H_{eff}^{(l),|s|\dagger} H_{eff}^{(l),|s|}|^{-1} \leq \prod_{a=0}^{|s|-1} \prod_{b=1}^M \rho^{A(a \cdot M + b, l)}. \quad (92)$$

By assigning in the bound from (89) we get

$$\overline{Pe}(\underline{\eta}^{(1, \dots, |s|)}, \rho) \leq \rho^{-\left(|s| \cdot (MN-l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i, l)\right)^+} \quad (93)$$

where $(x)^+$ equals x for $x \geq 0$ and 0 else.

Based on (93) the average over the channel realizations can be upper bounded by

$$\begin{aligned} E_H(\overline{Pe}(\underline{\eta}^{(s)}, \rho)) &= E_H(\overline{Pe}(\underline{\eta}^{(1, \dots, |s|)}, \rho)) \\ &\leq \int_{\xi_{\underline{i}, \underline{j}} \geq 0} \rho^{-\left(|s| \cdot (MN-l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i, l)\right)^+ - \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}} d\xi_{\underline{i}, \underline{j}}. \end{aligned} \quad (94)$$

where $\xi_{\underline{i}, \underline{j}} \geq 0$ means $\xi_{i,j} \geq 0$ for $i = 1, \dots, N$ and $j = 1, \dots, K \cdot M$. We divide the integration range to two sets

$$\int_{\xi_{\underline{i}, \underline{j}} \in \mathcal{A}} \rho^{-\left(|s| \cdot (MN-l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i, l)\right)^+ - \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}} d\xi_{\underline{i}, \underline{j}} + \int_{\xi_{\underline{i}, \underline{j}} \in \overline{\mathcal{A}}} 1 \cdot \rho^{-\sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}} d\xi_{\underline{i}, \underline{j}} \quad (95)$$

where $\mathcal{A} = \left\{ \bigcap_{i=1}^N \bigcap_{j=1}^{K \cdot M} 0 \leq \xi_{i,j} \leq K \cdot M \cdot N \right\}$, $\overline{\mathcal{A}} = \left\{ \bigcup_{i=1}^N \bigcup_{j=1}^{K \cdot M} \xi_{i,j} > K \cdot M \cdot N \right\}$ and for the second term in (95) we upper bounded the error probability per channel realization by 1.

We begin by lower bounding the DMT of the first term in (95). In a similar manner to [3], [6], for very large ρ and finite integration range, we can approximate the integral by finding the most dominant exponential term. Hence, for large ρ the first term in (95) equals

$$\rho^{-\min_{\xi_{i,j} \in \mathcal{A}} \left(\left(|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i,l) \right)^+ - \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j} \right)}. \quad (96)$$

Hence, by showing that

$$\begin{aligned} \min_{\xi_{i,j} \in \mathcal{A}} \left(|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i,l) \right)^+ &+ \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j} \\ &\geq MN - l(l+1) - (N+M-1-2l)r_{max} \end{aligned} \quad (97)$$

we get that the first term attains DMT which is lower bounded by $d_{M,N}^*(r_{max})$. In order to show (97) we use the following lemma.

Lemma 8. *The solution for the minimization problem*

$$\min_{\xi_{i,j} \in \mathcal{A}} \left(|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i,l) \right)^+ + \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}$$

equals to the solution of the following minimization problem

$$\min_{\underline{\alpha} \in \mathcal{A}'} \sum_{i=1}^{|s| \cdot M} (N - i + 1) \alpha_i$$

where $\underline{\alpha} = (\alpha_1, \dots, \alpha_{|s| \cdot M})^T$, and the set $\mathcal{A}'$ fulfils $0 \leq \alpha_i \leq K \cdot M \cdot N$ for $i = 1, \dots, |s| \cdot M$ and in addition

$$|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) = \sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M + b}.$$

Proof: The proof is in appendix F. ■

Based on Lemma 8 we can see that by proving

$$\min_{\underline{\alpha} \in \mathcal{A}'} \sum_{i=1}^{|s| \cdot M} (N - i + 1) \alpha_i \geq MN - l(l+1) - (N+M-1-2l)r_{max} \quad (98)$$

we also prove (97). Therefore, we wish to show that any vector $\underline{\alpha} \in \mathcal{A}'$ fulfils this inequality. Consider a certain vector $\underline{\alpha} \in \mathcal{A}'$. We define $\beta_{a \cdot M + b} = \frac{(N+1-b) \cdot \alpha_{a \cdot M + b}}{|s|}$ for $a = 0, \dots, |s|-1$, $b = 1, \dots, M$. From this definition we get

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M \beta_{a \cdot M + b} = \sum_{a=0}^{|s|-1} \sum_{b=1}^M \frac{(N - b + 1) \alpha_{a \cdot M + b}}{|s|} = MN - l(l+1) - (N+M-1-2l)r_{max}. \quad (99)$$

By assigning in (98) we get

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - a \cdot M - b + 1) \alpha_{a \cdot M + b} = \sum_{a=0}^{|s|-1} \sum_{b=1}^M \frac{|s| (N - a \cdot M - b + 1) \beta_{a \cdot M + b}}{N - b + 1}. \quad (100)$$

We use the following lemma to prove (98).

Lemma 9. *Consider $N \geq (|s| + 1)M - 1$, we get for any $a = 0 \dots, |s| - 1$ and $b = 1, \dots, M$*

$$\frac{|s| (N - (a \cdot M + b) + 1)}{N - b + 1} \geq 1.$$

Proof: The proof is in appendix G. ■

Since $K \geq |s|$ and $N \geq (K + 1)M - 1$ we can assign the inequality of Lemma 9 in (100) to get

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - a \cdot M - b + 1) \alpha_{a \cdot M + b} \geq \sum_{a=0}^{|s|-1} \sum_{b=1}^M \beta_{a \cdot M + b} = MN - l(l+1) - (N+M-1-2l)r_{max} \quad (101)$$

where the equality results from (99). This proves (98) and so proves that the DMT of the first term in (95) is lower bounded by $d_{M,N}^*(r_{max})$.

Now we show that the second term in (95) is also lower bounded by $d_{M,N}^*(r_{max})$.

$$\int_{\xi_{i,j} \in \bar{A}} 1 \cdot \rho^{-\sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}} d\xi_{i,j} \leq \int_{\xi_{1,1} > K \cdot M \cdot N} \rho^{-\xi_{1,1}} d\xi_{1,1} = \rho^{-K \cdot M \cdot N}.$$

Since $d_{M,N}^*(r_{max}) \leq K \cdot M \cdot N$, this shows that the DMT of the second term in (95) is also lower bounded by $d_{M,N}^*(r_{max})$.

We have shown that for $l = \lfloor r_{max} \rfloor$ the DMT of $E_H(\bar{P}e(\underline{\eta}^{(s)}, \rho))$ is lower bounded by $d_{M,N}^*(r_{max}) = MN - l(l-1) - (M+N-1-2l)r_{max}$ for any $s \subseteq \{1, \dots, K\}$. Since

$$\bar{P}e(H_{\text{eff}}^{(l),K}, \rho) \leq \sum_{s \subseteq \{1, \dots, K\}} \bar{P}e(\underline{\eta}^{(s)}, \rho)$$

we get that the DMT of the K sequences of IC's is also lower bounded by $d_{M,N}^*(r_{max})$. This concludes the proof. $\blacksquare$

In Theorem 5 we have shown that for $N \geq (K+1)M - 1$ the DMT of any IC is upper bounded by $d_{M,N}^*(r_{max})$. On the other hand in Theorem 7 we have shown that there exists a sequences of IC's that attain DMT which is lower bounded by $d_{M,N}^*(r_{max})$. Hence, the transmission scheme must attain the optimal DMT.

In the next theorem we prove the existence of a sequence of lattices that attain the optimal DMT as in 7.

Theorem 8. *For each tuple of multiplexing gains $(r_1, \dots, r_K)$ there exist K sequences of $2D_i T_i$ -real dimensional lattices transmitted over the unconstrained multiple access channels that attain diversity order of $d_{M,N}^*(r_{max})$.*

Proof: See appendix H $\blacksquare$

F. Discussion: Why Single User Performance is Attained

A question that may arise is why for $N \geq (K+1)M - 1$ the optimal DMT of single user is the dominant term, i.e. the optimal DMT equals $d_{M,N}^*(r_{max})$. We wish to give a short and looser analysis of the transmission scheme performance in order to demonstrate the reason for this behavior. We base our explanations on Theorems 6, 7.

First we wish to explain why when considering the K users pulled together, the optimal diversity order of MN is obtained for $r_{max} = 0$. The K users pulled together yield a sequence of $K \cdot M \cdot M$ -complex dimensional IC's. The error probability is upper bounded by

$$\rho^{-KMN} \cdot |H_{\text{eff}}^{(l=0),K \dagger} H_{\text{eff}}^{(l=0),K} |^{-1}.$$

We consider only the contribution of H to $|H_{\text{eff}}^{(l=0),K \dagger} H_{\text{eff}}^{(l=0),K} |^{-1}$. H occurs $N - M + 1$ times in the blocks of $H_{\text{eff}}^{(l=0),K}$. Let us assume that $\{\underline{h}_1, \dots, \underline{h}_{KM-1}\}$ contributes a constant to the determinant of H as a function of ρ . Hence, we are left with the contribution of $\underline{h}_{K \cdot M} \in \mathbb{C}^N$. We know that $\underline{h}_{K \cdot M}$ has $N - K \cdot M + 1$ orthogonal elements to the subspace spanned by $\{\underline{h}_1, \dots, \underline{h}_{KM-1}\}$. Assuming each orthogonal element has the same contribution of $\rho^{-\alpha_{KM}}$, we get a channel PDF $\rho^{-(N-KM+1)\alpha_{KM}}$, and an error probability that equals to $\rho^{-KMN+(N-M+1)\alpha_{KM}}$. If we assign $N = (K+1)M - 1$ then the error probability can be written as $\rho^{-KMN+KM\alpha_{KM}}$, while the channel PDF equals $\rho^{-M\alpha_{KM}}$. Hence, the error probability approaches 1 when $\alpha_{KM} = N$. In this case the channel PDF is ρ^{-MN} , which leads to the optimal diversity order. In general for $N = (K+1)M - 1$, the probability of receiving small determinant value for H (at least $N - K \cdot M + 1$ orthogonal elements for each column) is small enough to balance the contribution of H to the error probability ($N - M + 1$ occurrences). This is also true for any $N > (K+1)M - 1$, and for any combination of $|s|$ IC's pulled together, $1 \leq |s| \leq K$.

For a bit more accurate illustration let us consider the first line of the optimal DMT, for which we get

$$d_{M,N}^*(r_{max}) = M \cdot N - (M + N - 1)r_{max} \quad 0 \leq r_{max} \leq 1. \quad (102)$$

From Theorem 6 we know that for this case the error probability is upper bounded by

$$\sum_{s \subseteq \{1, \dots, K\}} \min \left(1, \rho^{-|s|(M \cdot N - (N + M - 1)r_{max})} \cdot |H_{\text{eff}}^{(l=0), (s) \dagger} H_{\text{eff}}^{(l=0), (s)} |^{-1} \right).$$

Each user uses an optimal transmission scheme for a channel with M transmit antennas and N receive antennas. Hence, when averaging over all channel realizations the bound for the cases where $|s| = 1$ equals to the required DMT (102). Next we wish to examine the bound for $|s| = K$ which takes the form

$$\min \left(1, \rho^{-K(M \cdot N - (N + M - 1)r_{max})} \cdot |H_{\text{eff}}^{(l=0), K \dagger} H_{\text{eff}}^{(l=0), K} |^{-1} \right). \quad (103)$$

We are interested in averaging over the channel realizations, where the analysis is done for very large ρ . As a result the average can be evaluated by considering the most dominant term in the integrand. Note that $H_{\text{eff}}^{(l=0), K}$ is a block diagonal matrix consisting of the blocks $\hat{H}_m^{(K)}$, $1 \leq m \leq N + M - 1$. In our example we are interested in the contribution of $\hat{H}_m^{(K)} = H$,

$1 \leq m \leq N - M + 1$ to the determinant, and assume the other blocks contribute to the determinant a constant as a function of ρ . As for the determinant of H , we assume that all columns except for the last column, $\underline{h}_{K \cdot M}$, contribute a constant to the determinant as a function of ρ . Hence, for large ρ the determinant in our example equals

$$|H^\dagger H|^{-1} \doteq \rho^{\min_{s \in \{K \cdot M, \dots, N\}} \xi_{s, K \cdot M}}.$$

Furthermore, assume each orthogonal component has the same contribution to the determinant, i.e. $\xi_{K \cdot M, K \cdot M} = \dots = \xi_{N, K \cdot M} = \alpha_{K \cdot M}$, with PDF $\rho^{-(N-K \cdot M+1)\alpha_{K \cdot M}}$. In the equivalent optimization problem in Lemma 8 this is equivalent to the event where $\alpha_1 = \dots = \alpha_{K \cdot M-1} = 0$. Hence, the upper bound (103) takes the following form

$$\rho^{-(K(M \cdot N - (N+M-1)r_{max}) - (N-M+1)\alpha_{K \cdot M})^+ - (N-K \cdot M+1)\alpha_{K \cdot M}}. \quad (104)$$

From Lemma 8 we know that the most dominant event occurs when $(\cdot)^+ = 0$, i.e.

$$\alpha_{K \cdot M} = \frac{K(M \cdot N - (N+M-1)r_{max})}{N-M+1}. \quad (105)$$

In this case the upper bound equals

$$\rho^{-K(M \cdot N - (N+M-1)r_{max}) \cdot \frac{N-K \cdot M+1}{N-M+1}}. \quad (106)$$

For the case $N = (K+1)M - 1$ we get that $\frac{N-K \cdot M+1}{N-M+1} = \frac{1}{K}$, which gives exactly the required DMT. On the other hand when $N > (K+1)M - 1$ we get that $\frac{N-K \cdot M+1}{N-M+1} > \frac{1}{K}$, where for $N < (K+1)M - 1$ we get $\frac{N-K \cdot M+1}{N-M+1} < \frac{1}{K}$. Hence, for $|s| = K$, we get that when $N = (K+1)M - 1$, the channel matrix is diverse enough to give the single user DMT for $N - M + 1$ occurrences of H . From Lemma 9 we get that for any $2 \leq |s| \leq K$ these inequalities hold in a similar manner.

G. Averaging Arguments

In this subsection we show that there exist $K \cdot M$ sequences of lattices that attain the optimal DMT, where for each segment of the optimal DMT there exist K sequences that attain it.

As a consequence of Theorem 6 and Theorem 7 we can state the following

Corollary 2. *For the case $N \geq (K+1)M - 1$ each segment of the optimal DMT of the unconstrained multiple-access channels, $d_{M,N}^*(r_{max})$, is attained by K sequences of $2D_{\lfloor r_{max} \rfloor} T_{\lfloor r_{max} \rfloor}$ -real dimensional lattices.*

Proof: Add proof ■

V. SUMMARY AND FURTHER RESEARCH

This work investigated the DMT of the unconstrained multiple-access channels. For the case $N \geq (K+1)M - 1$ an explicit upper bound on the optimal DMT of IC's for any multiplexing-gain tuple was presented. This upper bound coincides with the optimal DMT of finite constellations. A transmission scheme that attains this upper bound was also introduced and analyzed. For the case $N < (K+1)M - 1$ an upper bound on the optimal DMT of IC's was derived. For the general case this upper bound remained in the form of a maximization problem. This maximization problem depends on the number of IC's pulled together $|s|$, where $1 \leq |s| \leq K$, and on the average number of dimensions per channel use for each user. Note that for finite constellations the maximization depends only on the number of users pulled together. Hence, finding the upper bound on the optimal DMT of IC's is more involved. For the symmetric case, where all users transmit with the same multiplexing gain, an explicit upper bound on the optimal DMT of IC's was presented for the case $N < (K+1)M - 1$. By using this upper bound, it was shown that IC's are suboptimal compared to finite constellations in this case.

While this work presented a transmission scheme that attains the optimal DMT for the case $N \geq (K+1)M - 1$, for the case $N < (K+1)M - 1$ the upper bound on the optimal DMT of IC's is attained only for some cases. For instance whenever $N = 1$, orthogonalization obtains the optimal DMT of IC's in the symmetric case. Also for $K = 2$, $M = 2$ and $N = 3$, the transmission scheme presented in this paper attains the upper bound on the optimal DMT of IC's for the symmetric case. However, finding a transmission scheme that attains the optimal DMT for all $N < (K+1)M - 1$, remains an open problem even in the symmetric case.

APPENDIX A PROOF OF LEMMA 2

The proof outline is as follows. First we show that for finite constellations, the single user DMT is smaller than the contracted optimal DMT of any number of users (up to K) pulled together. Then we use this relation, together with the anchor points presented in Corollary 1 for the upper bound on IC's DMT, in order to prove the lemma.

Since $K > 1$ and M are positive integers, we get for $N \geq (K+1)M - 1$ that $M \leq \frac{N}{i}$, where $1 \leq i \leq K$. Hence for any $d_{i,D}^{*,i \cdot M,N}(i \cdot r)$, the range of average number of dimensions per channel use per user is $0 \leq D \leq \min(M, \frac{N}{i}) = M$, where $1 \leq i \leq K$.

We begin by showing that $d_{M,N}^*(r)$ is smaller or equal to $d_{i \cdot M,N}^*(i \cdot r)$ for $2 \leq i \leq K$, where $d_{i \cdot M,N}^*(i \cdot r)$ is the optimal DMT of finite constellations contracted by i , in a point-to-point channel with $i \cdot M$ transmit and N receive antennas. For the case $N > (K+1)M - 1$ we get that $\frac{N}{K+1} \geq M$. Hence we also get that $\frac{N}{i+1} \geq M$ for $1 \leq i \leq K$. Hence from Theorem 3 we can see that

$$d_{M,N}^*(r) \leq d_{i \cdot M,N}^*(i \cdot r) \quad 2 \leq i \leq K \quad (107)$$

by replacing K with i .

For $N = (K+1)M - 1$ we still get that $\frac{N}{i+1} \geq M$ for $1 \leq i \leq K-1$, and again based on Theorem 3

$$d_{M,N}^*(r) \leq d_{i \cdot M,N}^*(i \cdot r) \quad 2 \leq i \leq K-1. \quad (108)$$

There remains a case of $i = K$. We can see that for $N = (K+1)M - 1$ we get $M - \frac{1}{K} \leq \frac{N}{K+1} \leq M$. Hence we get from Theorem 3

$$d_{M,N}^*(r) \leq d_{KM,N}^*(Kr) \quad 0 \leq r \leq M - \frac{1}{K}. \quad (109)$$

For $M - \frac{1}{K} \leq r \leq M$ both $d_{M,N}^*(r)$ and $d_{KM,N}^*(Kr)$ are on the last straight line of the piecewise linear functions. By simply assigning $N = (K+1)M - 1$ we get for $M - \frac{1}{K} \leq r \leq M$

$$d_{M,N}^*(r) = d_{KM,N}^*(Kr) = KM(M-r). \quad (110)$$

From (107)-(110) we get for $N \geq (K+1)M - 1$ and $0 \leq r \leq M$ that

$$d_{M,N}^*(r) \leq d_{i \cdot M,N}^*(i \cdot r) \quad 2 \leq i \leq K. \quad (111)$$

So far we have proved the relation between the contracted optimal DMT of finite constellations with different number of users pulled together. Next we wish to use it in order to prove the relation between $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r)$ for $1 \leq i \leq K$. In [6, Corollary 2] it was shown that for $0 < D \leq \min(M, N)$

$$d_D^{*,M,N}(r) \leq d_{M,N}^*(r) \quad 0 \leq r \leq D. \quad (112)$$

On the other hand from Corollary 1 we can see that

$$d_{i \cdot D}^{*,i \cdot M,N}(l) = d_{i \cdot M,N}^*(l) = (i \cdot M - l)(N - l) \quad 1 \leq i \leq K \quad (113)$$

for $l = 0$ when $0 \leq i \cdot D \leq \frac{i \cdot MN}{i \cdot M + N - 1}$, and also for $l = 1, \dots, i \cdot M - 1$ when $\frac{i \cdot MN - l(l-1)}{i \cdot M + N - 1 - 2(l-1)} \leq i \cdot D \leq \frac{i \cdot MN - l(l+1)}{i \cdot M + N - 1 - 2l}$. Hence based on (111)-(113), and the fact that $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r)$ is a contraction of $d_{i \cdot D}^{*,i \cdot M,N}(r)$ for $2 \leq i \leq K$ we get

$$d_{i \cdot D}^{*,i \cdot M,N}(0) \geq d_D^{*,M,N}(0) \quad 2 \leq i \leq K \quad (114)$$

for $0 \leq D \leq \frac{MN}{i \cdot M + N - 1}$, and

$$d_{i \cdot D}^{*,i \cdot M,N}(l) \geq d_D^{*,M,N}\left(\frac{l}{i}\right) \quad 2 \leq i \leq K \quad (115)$$

for $l = 1, \dots, i \cdot M - 1$ and $\frac{MN - \frac{l}{i}(l-1)}{i \cdot M + N - 1 - 2(\frac{l}{i}-1)} \leq D \leq \frac{MN - \frac{l}{i}(l+1)}{i \cdot M + N - 1 - 2\frac{l}{i}}$. Since $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r)$, $1 \leq i \leq K$, are straight lines as a function of r , and also all of these straight lines are equal zero for $r = D$, i.e. $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot D) = 0$ for $1 \leq i \leq K$, the inequalities in (114), (115) leads to

$$d_D^{*,M,N}(r) \leq d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) \quad 2 \leq i \leq K$$

for any $0 \leq D \leq M$ and $0 \leq r \leq D$. This concludes the proof.

APPENDIX B PROOF OF LEMMA 3

First note that $\frac{N}{i+1} \geq \frac{L}{K}$ for $1 \leq i \leq K-1$. Hence from Theorem 3 we get that

$$d_{M,N}^*(r) \leq d_{i \cdot M,N}^*(i \cdot r) \quad 2 \leq i \leq K-1 \quad (116)$$

for $0 \leq r \leq \frac{L}{K}$. Based on (112), (113), (116) and Corollary 1 we get that

$$d_{i \cdot D}^{*,i \cdot M,N}(0) \geq d_D^{*,M,N}(0) \quad 2 \leq i \leq K-1 \quad (117)$$

for $0 \leq D \leq \frac{MN}{i \cdot M + N - 1}$, and

$$d_{i \cdot D}^{*,i \cdot M,N}(l) \geq d_D^{*,M,N}\left(\frac{l}{i}\right) \quad 2 \leq i \leq K-1 \quad (118)$$

for $l = 1, \dots, i \cdot M - 1$ and $\frac{MN - \frac{l}{i}(l-1)}{i \cdot M + N - 1 - 2(l-1)} \leq D \leq \frac{MN - \frac{l}{i}(l+1)}{i \cdot M + N - 1 - 2l}$. Again, since $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r)$, $1 \leq i \leq K$, are straight lines as a function of r , and also all of these straight lines are equal to zero for $r = D$, the inequalities in (117), (118) lead to

$$d_D^{*,M,N}(r) \leq d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) \quad 2 \leq i \leq K - 1$$

for any $0 \leq D \leq \frac{L}{K}$ and $0 \leq r \leq D$.

APPENDIX C PROOF OF LEMMA 4

Since $M \geq 1$ we get for $N < (K - 1)M + 1$ that $L = \frac{N}{K}$. Hence we can consider the range $0 \leq r \leq \frac{N}{K}$. We begin the proof by showing that for $N < (K - 1)M + 1$, $d_D^{*,M,N}$ is inferior compared to $d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r)$, for any $0 \leq D \leq \frac{N}{K}$. Then we show that the maximization over $d_D^{*,M,N}(r)$ yields $M \cdot N - M \cdot K \cdot r$.

We begin by showing that

$$d_D^{*,M,N}(r) \leq d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r) \quad 0 \leq D \leq \frac{N}{K}$$

for $0 \leq r \leq D$. By assigning $D = \frac{N}{K}$ in $d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r)$ we get

$$d_N^{*,K \cdot M,N}(K \cdot r) = (K \cdot M - N + 1) \cdot (N - Kr).$$

Since $N < (K - 1)M + 1$ we get

$$d_N^{*,K \cdot M,N}(0) = (K \cdot M - N + 1) \cdot N > M \cdot N. \quad (119)$$

From Corollary 1 we get that

$$d_N^{*,K \cdot M,N}(0) \leq d_{K \cdot D}^{*,K \cdot M,N}(0) \quad 0 \leq D \leq \frac{N}{K} \quad (120)$$

and also

$$d_D^{*,M,N}(0) \leq M \cdot N \quad 0 \leq D \leq \frac{N}{K}. \quad (121)$$

Since $d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r)$ $1 \leq i \leq K$ are straight lines as a function of r , that equal to zero for $r = D$, and also based on (119), (120), (121) and Lemma 3 we get

$$d_D^{*,M,N}(r) \leq d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) \quad 1 \leq i \leq K \quad (122)$$

for any $0 \leq D \leq \frac{N}{K}$ and $0 \leq r \leq D$. Hence the optimization problem takes the following form

$$\max_D \min_{1 \leq i \leq K} d_{i \cdot D}^{*,i \cdot M,N}(i \cdot r) = \max_D d_D^{*,M,N}(r) \quad 0 \leq r \leq \frac{N}{K}. \quad (123)$$

For $N < (K - 1)M + 1$ we get that $\frac{N}{K} < \frac{MN}{N+M-1}$. Also, from Corollary 1 we get that $d_D^{*,M,N}(0) = M \cdot N$ for $0 \leq D \leq \frac{MN}{N+M-1}$. Hence, in the range $0 \leq D \leq \frac{N}{K}$ we get a set of straight lines as a function of r , $d_D^{*,M,N}(r)$, where $d_D^{*,M,N}(0) = MN$ and $d_D^{*,M,N}(D) = 0$. As a result the maximal value for each r is attained for $D = \frac{N}{K}$, and equals

$$\max_D d_D^{*,M,N}(r) = d_{\frac{N}{K}}^{*,M,N}(r) = MN - KMr \quad 0 \leq r \leq \frac{N}{K}. \quad (124)$$

APPENDIX D PROOF OF LEMMA 5

The outline of the proof is as follows. We begin by finding the straight line that equals $d_{M,N}^*(\lfloor \frac{l}{2} \rfloor + 1)$ when $r = \lfloor \frac{l}{2} \rfloor + 1$, and also equals $d_{K \cdot M,N}^*((K - 1)M + \lfloor \frac{l+1}{2} \rfloor)$ for $r = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. Then we show that the average number of dimensions per channel use per user, D_l , corresponding to this straight line fulfils Corollary 1, i.e. for $d_D^{*,M,N}(r)$, D_l is in the range of average number of dimensions per channel use that rotate around the anchor point $d_{M,N}^*(\lfloor \frac{l}{2} \rfloor + 1)$, and also for $d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r)$, D_l is in the range of average number of dimensions per channel use that rotate around the anchor point $d_{K \cdot M,N}^*(K \cdot \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K})$. By showing that the straight line fulfils Corollary 1 for both cases, we get that the straight line equals $d_{D_l}^{*,M,N}(r)$ and also $d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r)$.

Let us denote the straight line by

$$d^*(r) = MN - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) - 2 \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\frac{l}{2} - \lfloor \frac{l}{2} \rfloor \right) - (N + M - 1 - l)r.$$

First we wish to show that $d^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{M,N}^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right)$, and also that $d^* \left(\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) = d_{K \cdot M, N}^* \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right)$. By simply assigning $r = \lfloor \frac{l}{2} \rfloor + 1$ we get

$$d^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = \left(N - \lfloor \frac{l}{2} \rfloor - 1 \right) \cdot \left(M - \lfloor \frac{l}{2} \rfloor - 1 \right) = d_{M,N}^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right). \quad (125)$$

For $r = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ we consider two cases. In the first case assume $l = 2b$, i.e. l is even. Under this assumption $\lfloor \frac{l+1}{2} \rfloor = \lfloor \frac{l}{2} \rfloor = b$, and so $r = \frac{(K-1)M + b}{K}$. By assigning $KM = N + M - 1 - 2b$ in $d^*(r)$ we get

$$d^* \left(\frac{(K-1)M + b}{K} \right) = MN - b(b + M + 1) - (K-1)M^2 = (N - (K-1)M - b) \cdot (M - b) = d_{K \cdot M, N}^* \left((K-1)M + b \right).$$

In the second case $l = 2b + 1$, i.e. l is odd. In this case we get $\lfloor \frac{l+1}{2} \rfloor = b + 1$, $\lfloor \frac{l}{2} \rfloor = b$ and $r = \frac{(K-1)M + b + 1}{K}$. By assigning $KM = N + M - 2 - 2b$ in $d^*(r)$ we get

$$d^* \left(\frac{(K-1)M + b + 1}{K} \right) = MN - (b + 1) \cdot (b + M + 1) - (K-1)M^2 = d_{K \cdot M, N}^* \left((K-1)M + b + 1 \right).$$

Hence from both cases we get

$$d^* \left(\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) = d_{K \cdot M, N}^* \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right). \quad (126)$$

Now we wish to show that $d^*(r) = d_{D_l}^{*,M,N}(r) = d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r)$. We begin by showing that $d^*(r) = d_{D_l}^{*,M,N}(r)$. First note that

$$d^*(D_l) = d_{D_l}^{*,M,N}(D_l) = d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot D_l) = 0. \quad (127)$$

Now let us denote $D_{\lfloor \frac{l}{2} \rfloor}^* = \frac{M \cdot N - \lfloor \frac{l}{2} \rfloor \cdot (\lfloor \frac{l}{2} \rfloor + 1)}{N + M - 1 - 2\lfloor \frac{l}{2} \rfloor}$ and $D_{\lfloor \frac{l}{2} \rfloor + 1}^* = \frac{M \cdot N - (\lfloor \frac{l}{2} \rfloor + 1) \cdot (\lfloor \frac{l}{2} \rfloor + 2)}{N + M - 1 - 2(\lfloor \frac{l}{2} \rfloor + 1)}$. We wish to show that

$$d_{D_{\lfloor \frac{l}{2} \rfloor + 1}^*}^{*,M,N}(0) = M \cdot N - \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \cdot \left(\lfloor \frac{l}{2} \rfloor + 2 \right) < d^*(0) \leq M \cdot N - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,M,N}(0). \quad (128)$$

In the first case we take $l = 2b$. In this case

$$d^*(0) = M \cdot N - b(b + 1).$$

On the other hand we also get

$$M \cdot N - \lfloor \frac{l}{2} \rfloor \cdot \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = M \cdot N - b \cdot (b + 1) = d^*(0)$$

which proves (128) for the first case. In the second case we consider $l = 2b + 1$. In this case

$$d^*(0) = M \cdot N - (b + 1)^2.$$

For this case we also get $M \cdot N - \lfloor \frac{l}{2} \rfloor \cdot (\lfloor \frac{l}{2} \rfloor + 1) = M \cdot N - b \cdot (b + 1)$ and $M \cdot N - (\lfloor \frac{l}{2} \rfloor + 1) \cdot (\lfloor \frac{l}{2} \rfloor + 2) = M \cdot N - (b + 1) \cdot (b + 2)$. It can be easily shown that for $b \geq 0$

$$M \cdot N - (b + 1) \cdot (b + 2) < d^*(0) = M \cdot N - (b + 1)^2 \leq M \cdot N - b \cdot (b + 1)$$

which proves (128) for the second case. From Corollary 1 and (125) we know that

$$d^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{D_{\lfloor \frac{l}{2} \rfloor + 1}^*}^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{M,N}^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right). \quad (129)$$

Since $d^*(r)$, $d_{D_{\lfloor \frac{l}{2} \rfloor}^*}^{*,M,N}(r)$ and $d_{D_{\lfloor \frac{l}{2} \rfloor + 1}^*}^{*,M,N}(r)$ are all straight lines that fulfil (128), (129) we get

$$D_{\lfloor \frac{l}{2} \rfloor}^* \leq D_l < D_{\lfloor \frac{l}{2} \rfloor + 1}^*. \quad (130)$$

As a result, from Corollary 1 and (130) we get

$$d_{D_l}^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{M,N}^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right). \quad (131)$$

Since $d^*(r)$ and $d_{D_l}^{*,M,N}(r)$ are straight lines and based on the equalities in (125), (127) and (131) we get

$$d^*(r) = d_{D_l}^{*,M,N}(r). \quad (132)$$

Next we prove $d^*(r) = d_{K \cdot D_l}^{*,K \cdot M, N}(K \cdot r)$. Let us denote $r_l = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ and $D_{r_l}^* = \frac{MN - (K \cdot r_l - 1)r_l}{K \cdot M + N - 1 - 2(K \cdot r_l - 1)}$. We wish to show

$$d_{K \cdot D_{r_l + \frac{1}{K}}}^{*,K \cdot M, N}(0) \leq d^*(0) < d_{K \cdot D_{r_l}}^{*,K \cdot M, N}(0). \quad (133)$$

We consider two cases. For the first case we take $l = 2 \cdot b$. In this case we get $r_{2b} = \frac{(K-1)M+b}{K}$, $d^*(0) = M \cdot N - b(b+1)$ and $N = (K-1)M + 1 + 2b$. Hence we get

$$d_{K \cdot D_{r_{2b} + \frac{1}{K}}}^{*,K \cdot M, N}(0) = KMN - ((K-1)M + b)(N - b) = MN - b(N - (K-1)M) + b^2. \quad (134)$$

Since $N - (K-1)M = 1 + 2b$ we get

$$MN - b(N - (K-1)M) + b^2 = MN - b(2b+1) + b^2 = MN - b(b+1). \quad (135)$$

From (134) and (135) we get $d^*(0) = d_{K \cdot D_{r_l + \frac{1}{K}}}^{*,K \cdot M, N}(0)$, which proves (133) for the first case. For the second case we take $l = 2b + 1$. In this case $r_{2b+1} = \frac{(K-1)M+b+1}{K}$, $d^*(0) = MN - (b+1)^2$ and $N = (K-1)M + 2b + 2$. For this case we get

$$d_{K \cdot D_{r_{2b+1}}}^{*,K \cdot M, N}(0) = KMN - ((K-1)M + b)(N - b - 1) = MN + (b+1)(K-1)M - bN + b(b+1). \quad (136)$$

Hence according to (133) we need to show

$$MN + (b+1)(K-1)M - bN + b(b+1) > MN - (b+1)^2. \quad (137)$$

By assigning $(K-1)M = N - 2b - 2$ we get from (137) $N > b + 1$. Since $0 \leq l = 2b + 1 \leq 2M - 3$, the maximal value of b is $b = M - 2$, which gives for $N = (K-1)M + 2b + 1$

$$N > M > M - 1 \geq b + 1.$$

Hence we get

$$d^*(0) < d_{K \cdot D_{r_{2b+1}}}^{*,K \cdot M, N}(0) = d_{K \cdot D_{r_l}}^{*,K \cdot M, N}(0). \quad (138)$$

On the other hand we get

$$d_{D_{r_{2b+1} + \frac{1}{K}}}^{*,K \cdot M, N}(0) = KMN - ((K-1)M + 1 + b)(N - b). \quad (139)$$

Hence according to (133), (139) we need to show that

$$MN + b(K-1)M - N(b+1) + b(b+1) \leq MN - (b+1)^2 \quad (140)$$

which again leads to $N > b + 1$. Hence we get

$$d_{K \cdot D_{r_l + \frac{1}{K}}}^{*,K \cdot M, N}(0) = d_{K \cdot D_{r_{2b+1} + \frac{1}{K}}}^{*,K \cdot M, N}(0) \leq d^*(0). \quad (141)$$

From (138) and (141) we get (133) for the second case. Hence we have proved (133). From Corollary 1 and (126) we know that

$$\begin{aligned} d^*\left(\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}\right) &= d_{K \cdot D_{r_l + \frac{1}{K}}}^{*,K \cdot M, N}\left((K-1)M + \lfloor \frac{l+1}{2} \rfloor\right) \\ &= d_{K \cdot D_{r_l}}^{*,K \cdot M, N}\left((K-1)M + \lfloor \frac{l+1}{2} \rfloor\right) = d_{K \cdot M, N}^*\left((K-1)M + \lfloor \frac{l+1}{2} \rfloor\right). \end{aligned} \quad (142)$$

Since $d^*(r)$, $d_{K \cdot D_{r_l}}^{*,K \cdot M, N}(r)$ and $d_{K \cdot D_{r_l + \frac{1}{K}}}^{*,K \cdot M, N}(r)$ are all straight lines that fulfil (133), (142) we get

$$D_{r_l}^* < D_l \leq D_{r_l + \frac{1}{K}}^*. \quad (143)$$

As a result, from Corollary 1 and (143) we get

$$d_{K \cdot D_l}^{*,K \cdot M, N}\left((K-1)M + \lfloor \frac{l+1}{2} \rfloor\right) = d_{K \cdot M, N}^*\left((K-1)M + \lfloor \frac{l+1}{2} \rfloor\right). \quad (144)$$

Since $d^*(r)$ and $d_{K \cdot D_l}^{*,K \cdot M, N}(K \cdot r)$ are straight lines, and based on the equalities in (126), (127) and (144) we get

$$d^*(r) = d_{K \cdot D_l}^{*,K \cdot M, N}(K \cdot r). \quad (145)$$

From (132), (145) we get the first part of the Lemma, where from (131), (144) we get the second part of the Lemma.

APPENDIX E
PROOF OF THEOREM 4

We begin by showing that $d_{K,M,N}^*(r)$ is the solution of the optimization problem in (10), i.e. the case where all users have the same average number of dimensions per channel use, D . Then we show that this is also the solution for (9).

First we find $\max_D \min_{1 \leq i \leq K} \left(d_{i,D}^{*,i \cdot M,N}(i \cdot r) \right)$, where $0 \leq r \leq \frac{L}{K}$. For the case $N \geq (K+1)M - 1$, we can see from Lemma 2 that

$$\max_D \min_{1 \leq i \leq K} \left(d_{i,D}^{*,i \cdot M,N}(i \cdot r) \right) = \max_D d_D^{*,M,N}(r) = d_{M,N}^*(r).$$

For the case $N < (K+1)M - 1$ it was shown in Lemma 4 that $d_{K,M,N}^*(r)$ is the optimization problem solution. For $N = (K+1)M - 1 + l$, where $l = 0, \dots, 2M - 3$ we know from Lemma 3 that $d_D^{*,M,N}(r)$ is smaller than $d_{i,D}^{*,i \cdot M,N}(r)$ for $1 \leq i \leq K - 1$ and any $0 \leq D \leq \frac{L}{K}$, $0 \leq r \leq D$. Hence the optimization problem for this case boils down to

$$\max_D \min \left\{ d_D^{*,M,N}(r), d_{K \cdot D}^{*,K \cdot M,N}(r) \right\} \quad (146)$$

for $0 \leq D \leq \frac{L}{K}$ and $0 \leq r \leq D$. From Lemma 5 we know that $d_{D_l}^{*,M,N}(\lfloor \frac{l}{2} \rfloor + 1) = d_{M,N}^*(\lfloor \frac{l}{2} \rfloor + 1)$. As a result, based on Corollary 1 we get that for $0 < D \leq D_l$

$$d_D^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \leq d_{M,N}^* \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{D_l}^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right)$$

and also

$$d_D^{*,M,N}(r) = 0 \leq d_{D_l}^{*,M,N}(r) \quad \forall r \geq D.$$

Hence we get for $0 < D \leq D_l$

$$d_D^{*,M,N}(r) \leq d_{D_l}^{*,M,N}(r) \quad \lfloor \frac{l}{2} \rfloor + 1 \leq r \leq \frac{L}{K}. \quad (147)$$

In a similar manner we also know from Lemma 5 that $d_{K \cdot D_l}^{*,K \cdot M,N}((K-1)M + \lfloor \frac{l+1}{2} \rfloor) = d_{K \cdot M,N}^*((K-1)M + \lfloor \frac{l+1}{2} \rfloor)$. As a result, based on Corollary 1 we get that for $D_l \leq D \leq \frac{L}{K}$

$$d_{K \cdot D}^{*,K \cdot M,N} \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right) \leq d_{K \cdot M,N}^* \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right) = d_{K \cdot D_l}^{*,K \cdot M,N} \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right)$$

and also

$$d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r) = 0 \leq d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r) \quad \forall r \geq D_l.$$

Since $D_l \geq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$ and these are straight lines, we also get for $D_l \leq D \leq \frac{L}{K}$

$$d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r) \leq d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r) \quad 0 \leq r \leq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (148)$$

Hence, based on (147), (148) and the fact that $d_{D_l}^{*,M,N}(r) = d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r) = d^*(r)$ (Lemma 5), we get that

$$\max_D \min \left\{ d_D^{*,M,N}(r), d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r) \right\} = d^*(r) = d_{K \cdot M,N}^*(r) \quad \lfloor \frac{l}{2} \rfloor + 1 \leq r \leq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (149)$$

Next we find the solution for $0 \leq r \leq \lfloor \frac{l}{2} \rfloor + 1$. Our starting point is $D = D_l$ for which $d_{D_l}^{*,M,N}(r) = d_{K \cdot D_l}^{*,K \cdot M,N}(K \cdot r)$. Since $d_{D_l}^*(\lfloor \frac{l}{2} \rfloor + 1) = d_{M,N}^*(\lfloor \frac{l}{2} \rfloor + 1)$ we get from Corollary 1 and (130) that

$$\frac{MN - \lfloor \frac{l}{2} \rfloor (\lfloor \frac{l}{2} \rfloor + 1)}{M + N - 1 - 2\lfloor \frac{l}{2} \rfloor} \leq D_l < \frac{MN - (\lfloor \frac{l}{2} \rfloor + 1)(\lfloor \frac{l}{2} \rfloor + 2)}{M + N - 1 - 2(\lfloor \frac{l}{2} \rfloor + 1)}. \quad (150)$$

We also get from Corollary 1 that for $D_l \leq D \leq \frac{L}{K}$

$$d_D^{*,M,N}(r) \leq d_{M,N}^*(r). \quad (151)$$

In addition it can be easily shown that for $N = (K+1)M - 1 + l$, where $l = 0, \dots, 2M - 3$

$$\lfloor \frac{l}{2} \rfloor + 1 \leq \frac{N}{K+1} \leq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \quad (152)$$

by considering the cases where l is even and odd, i.e. the cases where $l = 2b$ and $l = 2b + 1$. For the case $\frac{MN - \lfloor \frac{l}{2} \rfloor (\lfloor \frac{l}{2} \rfloor + 1)}{M + N - 1 - 2\lfloor \frac{l}{2} \rfloor} \leq D \leq D_l$ assume $d_{K \cdot D}^{*,K \cdot M,N}(K \cdot r)$ rotates around anchor point with multiplexing gain m . In this case there are two possibilities. The first possibility is $\lfloor \frac{l}{2} \rfloor + 2 \leq m \leq \frac{L}{K}$ where $m \in \mathbb{Z}$. When this is the case, we get from Corollary 1 that in the range

$$\frac{MN - \lfloor \frac{l}{2} \rfloor (\lfloor \frac{l}{2} \rfloor + 1)}{M+N-1-2\lfloor \frac{l}{2} \rfloor} \leq D < D_l$$

$$d_D^{*,M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) = d_{K \cdot D_l}^{*,K \cdot M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right) \leq d_{K \cdot D}^{*,K \cdot M,N} \left(\lfloor \frac{l}{2} \rfloor + 1 \right). \quad (153)$$

For the second possibility $0 \leq m \leq \lfloor \frac{l}{2} \rfloor + 1$ we get from (152) and Theorem 3 that

$$d_{K \cdot D}^{*,K \cdot M,N} (K \cdot m) = d_{K \cdot M,N}^* (K \cdot m) \geq d_{M,N}^* (m) \geq d_D^{*,M,N} (m). \quad (154)$$

In addition $d_D^{*,M,N} (D) = d_{K \cdot D}^{*,K \cdot M,N} (D) = 0$. Since these are straight lines we get in the range $\frac{MN - \lfloor \frac{l}{2} \rfloor (\lfloor \frac{l}{2} \rfloor + 1)}{M+N-1-2\lfloor \frac{l}{2} \rfloor} \leq D \leq D_l$

$$d_D^{*,M,N} (r) \leq d_{K \cdot D}^{*,K \cdot M,N} (K \cdot r). \quad (155)$$

By induction, for $\frac{MN - (s-1)s}{M+N-1-2(s-1)} \leq D \leq \frac{MN - s(s+1)}{M+N-1-2s}$, $s = \lfloor \frac{l}{2} \rfloor, \dots, 1$, assuming $d_{K \cdot D^{(s)}}^{*,K \cdot M,N} (K \cdot r) \geq d_{D^{(s)}}^{*,M,N} (r)$, where $D^{(s)} = \frac{MN - s(s+1)}{M+N-1-2s}$ we get from similar arguments to (152)-(155) that

$$d_D^{*,M,N} (r) \leq d_{K \cdot D}^{*,K \cdot M,N} (r). \quad (156)$$

Finally for $0 < D \leq \frac{MN}{N+1}$, from the same arguments as in (156) we also get

$$d_D^{*,M,N} (r) \leq d_{K \cdot D}^{*,K \cdot M,N} (r). \quad (157)$$

Hence, from (155), (156) and (157) we get that in the range $0 < D \leq D_l$

$$\max_D \min \{d_D (r), d_{K \cdot D} (K \cdot r)\} = \max_D d_D (r). \quad (158)$$

Since $D_l \geq \frac{MN - \lfloor \frac{l}{2} \rfloor (\lfloor \frac{l}{2} \rfloor + 1)}{M+N-1-2\lfloor \frac{l}{2} \rfloor}$ (150), and also from (151), (158) we get based on Corollary 1

$$\max_D \min \{d_D (r), d_{K \cdot D} (K \cdot r)\} = d_{M,N}^* (r) = d_{K \cdot M,N}^* (r) = 0 \leq r \leq \lfloor \frac{l}{2} \rfloor + 1. \quad (159)$$

Now we wish to find $d_{K \cdot M,N}^* (r)$ for $\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \leq r \leq \frac{L}{K}$. Let us denote $r_l = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. Since

$$d_{K \cdot D_l}^{*,K \cdot M,N} \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right) = d_{K \cdot M,N}^* \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right)$$

we get (143)

$$\frac{NM - (K \cdot r_l - 1)r_l}{KM + N - 1 - 2(K \cdot r_l - 1)} < D_l \leq \frac{NM - r_l(K \cdot r_l + 1)}{KM + N - 1 - 2 \cdot K \cdot r_l}. \quad (160)$$

Based on Corollary 1 we get in the range $0 < D \leq D_l$

$$d_{K \cdot D}^{*,K \cdot M,N} (K \cdot r) \leq d_{K \cdot M,N}^* (K \cdot r). \quad (161)$$

For $D_l < D \leq \frac{NM - \frac{r_l}{K}(r_l+1)}{KM+N-1-2r_l}$ assume $d_D^{*,M,N} (r)$ rotates around anchor point with multiplexing gain $\frac{m}{K}$, where $m \in \mathbb{Z}$. In case $0 \leq m < (K-1)M + \lfloor \frac{l+1}{2} \rfloor$, based on Corollary 1 and Lemma 5 we get

$$\begin{aligned} d_D^{*,M,N} \left(\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) &\geq d_{D_l}^{*,M,N} \left(\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \right) \\ &= d_{K \cdot M,N}^* \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right) \geq d_{K \cdot D}^{*,K \cdot M,N} \left((K-1)M + \lfloor \frac{l+1}{2} \rfloor \right). \end{aligned} \quad (162)$$

In case $(K-1)M + \lfloor \frac{l+1}{2} \rfloor \leq m \leq L$ we get from (152) and Theorem 3 that

$$d_D^{*,M,N} (m) = d_{M,N}^* (m) \geq d_{K \cdot M,N}^* (K \cdot m) \geq d_{K \cdot D}^{*,K \cdot M,N} (K \cdot m). \quad (163)$$

We also get $d_D^{*,M,N} (D) = d_{K \cdot D}^{*,K \cdot M,N} (K \cdot D) = 0$. Since these are straight lines, we get for $D_l < D \leq \frac{NM - \frac{r_l}{K}(r_l+1)}{KM+N-1-2r_l}$

$$d_D^{*,M,N} (r) \geq d_{K \cdot D}^{*,K \cdot M,N} (K \cdot r). \quad (164)$$

Similarly to (156) it can be shown by induction for $\frac{MN - \frac{s}{K}(s-1)}{KM+N-1-2(s-1)} \leq D \leq \frac{MN - \frac{s}{K}(s+1)}{KM+N-1-2s}$, $s = (K-1)M + \lfloor \frac{l+1}{2} \rfloor + 1, \dots, L-1$, that

$$d_D^{*,M,N} (r) \geq d_{K \cdot D}^{*,K \cdot M,N} (K \cdot r). \quad (165)$$

Hence from (161), (164) and (165) we get

$$\max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\} = d_{K \cdot M, N}^*(K \cdot r) = d_{K, M, N}^*(r) \quad \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \leq r \leq \frac{L}{K}. \quad (166)$$

The remaining open point for $N = (K-1)M + 1 + l$, $l = 0, \dots, 2M-3$ is the case

$$\lfloor \frac{l}{2} \rfloor + 1 = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (167)$$

First we would like to find when this equality takes place. For this we consider two cases. First let us consider $l = 2b$. For this case (167) takes the following form

$$K \cdot (b+1) = (K-1)M + b$$

which leads to

$$b = M - \frac{K}{K-1}.$$

Since $b \geq 0$, $M \geq 1$ and $K \geq 2$ are integers, we get that this equality can only hold when $K = 2$. In this case we get $M = b + 2$ and $N = 3(b+1)$. Since both $M \geq 1$ and $N \geq 1$, we get that $b \geq 2$. Hence by assigning $s = b + 1$ we get (167) for $K = 2$, $M = s + 1$ and $N = 3s$, where $s \geq 1$ is an integer. For the second case we consider $l = 2b + 1$. In this case by assigning in (167) we get $b = M - 1$. However we know that $l = 2b + 1 \leq 2M - 3$, and so $b \leq M - 2$. Hence for $l = 2b + 1$ (167) can not take place. From (152), (167) we get

$$\lfloor \frac{l}{2} \rfloor + 1 = \frac{N}{K+1} = \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}. \quad (168)$$

In addition, (167) holds only for $l = 2b$. For this case simply by assigning $l = 2b$ we get

$$D_{\lfloor \frac{l}{2} \rfloor}^* = D_l = D_{r_l}^*. \quad (169)$$

Hence, we are interested in finding $d_{K, M, N}^*(r)$ for the case $K = 2$, $M = s + 1$ and $N = 3s$, where $s \geq 1$ is an integer. For $D > D_l$ we get $d_D^{*, s+1, 3s}(r) \leq d_{s+1, 3s}^*(r)$. On the other hand for $0 < D < D_l = D_{\lfloor \frac{l}{2} \rfloor}^*$ we know from Corollary 1 and (168), that $d_D^{*, s+1, 3s}(r)$ rotates around anchor point with multiplexing gain $m \leq \frac{N}{K+1}$. Hence, by similar arguments to the ones used in (154) we get $d_D^{*, s+1, 3s}(m) \leq d_{2 \cdot D}^{*, 2 \cdot (s+1), 3s}(2 \cdot m)$, which leads to $d_D^{*, s+1, 3s}(r) \leq d_{2 \cdot D}^{*, 2 \cdot (s+1), 3s}(2 \cdot r)$ for $0 < D < D_l$. Hence in the range $0 \leq r \leq \frac{N}{K+1}$ the optimal solution is $d_{s+1, 3s}^*(r)$. From the same arguments we get for $\frac{N}{K+1} \leq r \leq \frac{L}{K}$ that the optimal solution is $d_{2 \cdot (s+1), 3s}^*(2 \cdot r)$. Hence we get

$$d_{K, M, N}^*(r) = d_{2, s+1, 3s}^*(r) = \begin{cases} d_{s, 3s}^*(r) & 0 \leq r \leq \frac{N}{K+1} = s \\ d_{2s, 3s}^*(2 \cdot r) & s \leq r \leq 3s. \end{cases} \quad (170)$$

So far we have shown that

$$\max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\} = d_{K, M, N}^*(r). \quad (171)$$

Now we wish to show that this is also the solution of (9). We begin with the case for which $d_{K, M, N}^*(r) = d_{M, N}^*(r)$. This is the case for $N \geq (K+1)M - 1$, and also for $N = (K-1)M - 1 + l$, $l = 0, \dots, 2M-3$ when $0 \leq r \leq \lfloor \frac{l}{2} \rfloor + 1$. As a base line we consider the case $D_1 = \dots, D_K = D_r^*$, where D_r^* is the optimal average number of dimensions per channel use per user in (171). Without loss of generality assume user i has $D_i \neq D_r^*$. In this case based on Corollary 1 we get

$$\min_{\forall A \subseteq \{1, \dots, K\}, D_i \neq D_r^*} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right) \leq d_{M, N}^*(r) = \max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\}. \quad (172)$$

Hence the optimal solution must be $d_{K, M, N}^*(r)$, attained for $D_1 = \dots = D_K = D_r^*$. Now we consider the case where $d_{K, M, N}^*(r) = d_{K \cdot M, N}^*(r)$, for which $N = (K-1)M + 1 + l$, where $l = 0, \dots, 2M-3$ and $\frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K} \leq r \leq \frac{L}{K}$. In this case the optimal solution in (171) for the K users pulled together is attained for $K \cdot D_r^*$. Let us assume that $\sum_{i=1}^K D_i \neq K \cdot D_r^*$. In this case we get

$$\min_{\forall A \subseteq \{1, \dots, K\}, \sum_{i=1}^K D_i \neq K \cdot D_r^*} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right) \leq d_{K \cdot M, N}^*(K \cdot r) = \max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\}. \quad (173)$$

Hence the optimal solution must be $d_{K, M, N}^*(r)$. Now let us consider the case $N < (K-1)M + 1$. In this case the optimal solution in (171) is attained for $D_r^* = \frac{N}{K}$. Without loss of generality assume $D_i < \frac{N}{K}$. In this case we get from Corollary 1 that

$$\min_{\forall A \subseteq \{1, \dots, K\}, D_i < \frac{N}{K}} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right) \leq MN - KM r = \max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\}. \quad (174)$$

which shows again that $d_{K,M,N^*}(r)$ is the solution. Finally we consider the case where $d_{K,M,N}^*(r) = d^*(r)$, i.e. the case where $N = (K-1)M + 1 + l$, $l = 0, \dots, 2M-3$ and $\lfloor \frac{l}{2} \rfloor + 1 \leq r \leq \frac{(K-1)M + \lfloor \frac{l+1}{2} \rfloor}{K}$. Without loss of generality assume $D_i \neq D_l$. In this case we get from Corollary 1

$$\min_{\forall A \subseteq \{1, \dots, K\}, D_i \neq D_l} \left(d_{\sum_{a \in A} D_a}^{*, |A| \cdot M, N}(|A| \cdot r) \right) \leq d^*(r) = \max_D \min \{d_D(r), d_{K \cdot D}(K \cdot r)\} \quad (175)$$

which shows that $d_{K,M,M}^*(r)$ is the optimal solution. This concludes the proof.

APPENDIX F PROOF OF LEMMA 8

Recall that the optimization problem

$$\min_{\xi_{i,j} \in \mathcal{A}} \left(|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i, l) \right)^+ + \sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}$$

where

$$A(a \cdot M + b, l) = (N - b + 1) \min_{s \in \{aM+b, \dots, N\}} \xi_{s, aM+b} \quad (176)$$

for $b = 1$ and $a = 0, \dots, |s| - 1$, and

$$A(a \cdot M + b, l) = (N - b + 1) \min_{s \in \{aM+b, \dots, N\}} \xi_{s, aM+b} + \sum_{i=1}^{\min(l, b-1)} \min_{s \in \{aM+b-i, \dots, N\}} \xi_{s, aM+b} \quad (177)$$

for $b = 2, \dots, M$ and $a = 0, \dots, |s| - 1$. For $|s| \cdot M + 1 \leq j \leq K \cdot M$ and $1 \leq i \leq N$, we get that $\xi_{i,j}$ occurs only in $\sum_{i=1}^N \sum_{j=1}^{K \cdot M} \xi_{i,j}$ where $\xi_{i,j} \geq 0$. Thus, the minimization is obtained when

$$\xi_{i,j} = 0 \quad |s| \cdot M + 1 \leq j \leq K \cdot M, \quad 1 \leq i \leq N. \quad (178)$$

Therefore, we can rewrite the optimization problem

$$\min_{\xi_{i,j} \in \mathcal{A}} \left(|s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) - \sum_{i=1}^{|s|M} A(i, l) \right)^+ + \sum_{i=1}^N \sum_{j=1}^{|s| \cdot M} \xi_{i,j}. \quad (179)$$

Now we wish to show that $\xi_{i,j} = 0$ for $j = 1, \dots, |s| \cdot M$ and $i = 1, \dots, j-1$. Essentially, we show for $i < j$ that reducing $\xi_{i,j}$ has larger effect on (179) than the effect of $-\min_{s \in \{i, \dots, N\}} \xi_{s,j}$. First let us observe $\xi_{i, a \cdot M + b}$ for $i = 1, \dots, a \cdot M + b - \min(l, b-1) - 1$, where $a = 0, \dots, |s| - 1$, $b = 1, \dots, M$. Note that this values do not have any representation in $A(a \cdot M + b, l)$. Therefore, they do not effect $(\cdot)^+$ and only effect $\sum_{i=1}^N \sum_{j=1}^{|s| \cdot M} \xi_{i,j}$. Thus, in order to obtain the minimum we must choose

$$\xi_{i, a \cdot M + b} = 0 \quad i = 1, \dots, a \cdot M + b - \min(l, b-1) - 1$$

for any $a = 0, \dots, |s| - 1$ and $b = 1, \dots, M$. Note that the function in (179) is continues. In case $(\cdot)^+ = 0$ the function in (179) can be written as

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M \sum_{i=a \cdot M + b - \min(l, b-1)}^N \xi_{i, a \cdot M + b} \quad (180)$$

In this case as long as $(\cdot)^+ = 0$ reducing $\xi_{i, a \cdot M + b}$ for $a \cdot M + b - \min(l, b-1) \leq i \leq a \cdot M + b - 1$ and $a = 0, \dots, |s| - 1$, $b = 2, \dots, M$ also reduces (180). When $(\cdot)^+ > 0$ (179) can be written as

$$\begin{aligned} & |s| \cdot (MN - l(l+1) - (N+M-1-2l)r_{max}) + \sum_{a=0}^{|s|-1} \sum_{b=2}^M \sum_{i=1}^{\min(l, b-1)} \left(\xi_{a \cdot M + b - i, a \cdot M + b} - \min_{s \in \{a \cdot M + b - i, \dots, N\}} \xi_{s, a \cdot M + b} \right) \\ & + \sum_{a=0}^{|s|-1} \sum_{b=1}^M \left(\sum_{s=a \cdot M + b}^N \xi_{s, a \cdot M + b} - (N - b + 1) \min_{s \in \{a \cdot M + b, \dots, N\}} \xi_{s, a \cdot M + b} \right). \end{aligned} \quad (181)$$

Since $\xi_{a \cdot M + b - i, a \cdot M + b} \geq \min_{s \in \{a \cdot M + b - i, \dots, N\}} \xi_{s, a \cdot M + b}$, reducing $\xi_{a \cdot M + b - i, a \cdot M + b}$ also reduces (181). Since the function is continues, considering these two cases is sufficient in order to state that the minimum is obtained when

$$\xi_{i,j} = 0 \quad j = 1, \dots, |s| \cdot M, \quad i = 1, \dots, j-1. \quad (182)$$

This is due to the fact that for any value of $\{\xi_{s,a \cdot M+b}\}_{s=a \cdot M+b}^N$, $a = 0, \dots, |s| - 1$, $b = 1, \dots, M$, (180),(181) are reduced when decreasing $\{\xi_{a \cdot M+b-i, a \cdot M+b}\}_{i=1}^{\min(l, b-1)}$, and the function is continues. Note that from (181) we can see that decreasing $\sum_{s=a \cdot M+b}^N \xi_{s,a \cdot M+b}$ does not necessarily decrease the function. This is due to the fact that $N - b + 1 \geq N - (a \cdot M + b) + 1$, and so the contribution of $(N - b + 1) \min_{s \in \{a \cdot M+b, \dots, N\}} \xi_{s,a \cdot M+b}$ may be more significant.

Based on (182) we can rewrite the function in the following manner

$$\left(|s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}) - \sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \min_{s \in \{a \cdot M+b, \dots, N\}} \xi_{s,a \cdot M+b} \right)^+ + \sum_{a=0}^{|s|-1} \sum_{b=1}^M \sum_{s=a \cdot M+b}^N \xi_{s,a \cdot M+b}. \quad (183)$$

From (183) we can see that the minimum is obtained when

$$\xi_{s,a \cdot M+b} = \alpha_{a \cdot M+b} \quad a \cdot M + b \leq s \leq N \quad (184)$$

for $a = 0, \dots, |s| - 1$, $b = 1, \dots, M$. This is due to the fact that when the values are not equal, reducing the values to the minimal value will not change $\min_{s \in \{a \cdot M+b, \dots, N\}} \xi_{s,a \cdot M+b}$ while reducing $\sum_{s=a \cdot M+b}^N \xi_{s,a \cdot M+b}$. Therefore, we can write (183) as follows

$$\left(|s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}) - \sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} \right)^+ + \sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - (a \cdot M + b) + 1) \alpha_{a \cdot M+b} \quad (185)$$

where $0 \leq \alpha_i \leq K \cdot M \cdot N$, $i = 1, \dots, |s| \cdot M$.

We wish to show that the minimum is obtained when

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} = |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}).$$

Again, note that the function is continues. For the case where $(\cdot)^+ = 0$ we get

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - (a \cdot M + b) + 1) \alpha_{a \cdot M+b}. \quad (186)$$

This is attained when $\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} \geq |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max})$. Evidently for this case the minimal values occur at $\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} = |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max})$. On the other hand for the case $(\cdot)^+ > 0$ we get

$$|s| \cdot (MN - l(l+1)) - \sum_{a=0}^{|s|-1} \sum_{b=1}^M (a \cdot M) \alpha_{a \cdot M+b}. \quad (187)$$

Hence increasing $\sum_{a=0}^{|s|-1} \sum_{b=1}^M (a \cdot M) \alpha_{a \cdot M+b}$ decreases the function as long as $(\cdot)^+ > 0$ which means

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} < |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}).$$

Hence, based on the fact that the function is continues we get again that for this case the minimal values occur at

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} = |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}).$$

The event $\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M+b} = |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max})$, where $\alpha_i \geq 0$, $i = 1, \dots, |s| \cdot M$, is within the range $0 \leq \alpha_i \leq K \cdot M \cdot N$, $i = 1, \dots, |s| \cdot M$. This is because in order to fulfil the equality we get

$$\max(\alpha_1, \dots, \alpha_{|s| \cdot M}) \leq \frac{|s| \cdot (MN - l(l+1))}{N - b + 1} \leq K \cdot M \cdot N.$$

Therefore, the minimization problem solution is obtained for

$$\min_{\underline{\alpha} \in \mathcal{A}'} \sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - (a \cdot M + b) + 1) \alpha_{a \cdot M+b}$$

where the set $\mathcal{A}'$ is defined as $0 \leq \alpha_i \leq K \cdot M \cdot N$, $i = 1, \dots, |s| \cdot M$ together with

$$\sum_{a=0}^{|s|-1} \sum_{b=1}^M (N - b + 1) \alpha_{a \cdot M + b} = |s| \cdot (MN - l(l+1) - (N + M - 1 - 2l) r_{max}).$$

APPENDIX G PROOF OF LEMMA 9

We begin by analyzing the case $a = |s| - 1$ and $b = M$. For this case let us consider $N = (|s| + 1)M - 1$. In this case we get

$$\frac{|s|(N - |s| \cdot M + 1)}{N - M + 1} = \frac{|s|(M)}{|s|M} = 1. \quad (188)$$

Note that for $c \geq d \geq 0$ and $x_2 > x_1 \geq c$ we get

$$\frac{x_2 - c}{x_2 - d} \geq \frac{x_1 - c}{x_1 - d}. \quad (189)$$

Hence, based on (189), (188), we get for $N > (|s| + 1)M - 1$

$$\frac{|s|(N - (|s| \cdot M - 1))}{N - (M - 1)} \geq \frac{|s|(M)}{|s|M} = 1. \quad (190)$$

So far we have proved the lemma for $a = |s| - 1$, $b = M$ and $N \geq (|s| + 1)M - 1$. For the general case we consider $\frac{|s|(N - (a \cdot M + b - 1))}{N - (b - 1)}$. In this case we get

$$\frac{|s|(N - (a \cdot M + b - 1))}{N - (b - 1)} = |s| \frac{(N + |s|M - a \cdot M - b) - (|s|M - 1)}{(N + M - b) - (M - 1)} \geq |s| \frac{(N + |s|M - a \cdot M - b) - (|s|M - 1)}{(N + |s|M - a \cdot M - b) - (M - 1)} \quad (191)$$

where the inequality results from the fact that $M - b \leq |s|M - a \cdot M - b$. From (189) and (190) we get that

$$|s| \frac{(N + |s|M - a \cdot M - b) - (|s|M - 1)}{(N + |s|M - a \cdot M - b) - (M - 1)} \geq |s| \frac{N - (|s|M - 1)}{N - (M - 1)} \geq 1. \quad (192)$$

From (191), (192) we get the proof of the lemma also for any $a = 0, \dots, |s| - 1$ and $b = 1, \dots, M$. This concludes the proof.

APPENDIX H PROOF OF THEOREM 8

Need to add the proof.

REFERENCES

- [1] I. Telatar, "Capacity of multi-antenna gaussian channels," *Europ. Trans. Telecommu*, vol. 10, pp. 585–595, Nov. 1999.
- [2] G. Foschini, "Layered space-time architecture for wireless communication in a fading environment when using multi-element antennas," *Bell Labs Tech. J.*, vol. 1, no. 2, pp. 41–59, 1996.
- [3] L. Zheng and D. Tse, "Diversity and multiplexing: a fundamental tradeoff in multiple-antenna channels," *IEEE Trans. on Inf. Theory*, vol. 49, no. 5, pp. 1073–1096, 2003.
- [4] P. Elia, K. Kumar, S. Pawar, P. Kumar, and H.-F. Lu, "Explicit space time codes achieving the diversity multiplexing gain tradeoff," *IEEE Trans. on Inf. Theory*, vol. 52, no. 9, pp. 3869–3884, sep. 2006.
- [5] H. El Gamal, G. Caire, and M. Damen, "Lattice coding and decoding achieve the optimal diversity-multiplexing tradeoff of mimo channels," *IEEE Trans. on Inf. Theory*, vol. 50, no. 6, pp. 968–985, 2004.
- [6] Y. Yona and M. Feder, "Fundamental limits of infinite constellations in mimo fading channels," *Submitted to IEEE Trans. on Information Theory. Available on arxiv.org*.
- [7] G. Polytyrev, "On Coding Without Restrictions for the AWGN Channel," *IEEE Trans. on Inf. Theory*, vol. 40, no. 2, pp. 409–417, 1994.
- [8] D. Tse, P. Viswanath, and L. Zheng, "Diversity-multiplexing tradeoff in multiple-access channels," *Information Theory, IEEE Transactions on*, vol. 50, no. 9, pp. 1859–1874, sept. 2004.
- [9] Y.-H. Nam and H. El Gamal, "On the optimality of lattice coding and decoding in multiple access channels," in *Information Theory, 2007. ISIT 2007. IEEE International Symposium on*, june 2007, pp. 211–215.
- [10] V. Tarokh, H. Jafarkhani, and A. Calderbank, "Space-time block codes from orthogonal designs," *IEEE Trans. on Inf. Theory*, vol. 45, no. 5, pp. 1456–1467, jul. 1999.
- [11] S. Alamouti, "A simple transmit diversity technique for wireless communications," *Selected Areas in Communications, IEEE Journal on*, vol. 16, no. 8, pp. 1451–1458, oct 1998.
- [12] Y. Yona and M. Feder, "The fundamental limits of infinite constellations in mimo fading channels," *arXiv.org*.